


R&S® SGT100A SGMA VECTOR RF SOURCE



Fast and compact solution – optimized for automated test environments

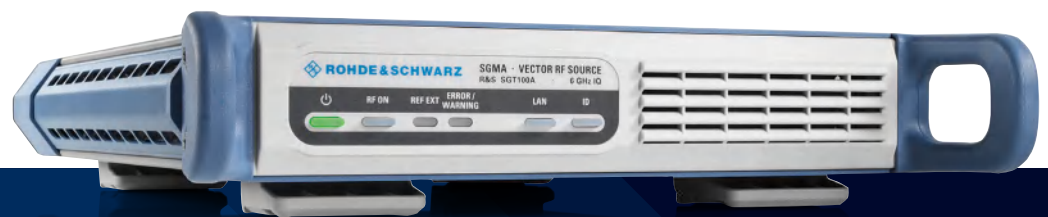

Product Brochure
Version 10.00

ROHDE & SCHWARZ

Make ideas real



AT A GLANCE

The R&S®SGT100A is an RF vector signal generator with an integrated baseband generator. It has been optimized for use in production and automated applications. Designed as a fast and compact, space-saving solution, it provides top speed to ensure optimized throughput and fits into any test system.

The R&S®SGT100A has a clear focus on automated environments. Its main characteristics are high speed and a compact design.

The R&S®SGT100A is the first 1 HU, ½ 19" vector signal generator up to 6 GHz with an integrated baseband generator. The radio frequency chain has been optimized for fastest frequency and level switchover times. In the baseband, the multisegment waveform mode helps users quickly switch from one test signal to the next.

Though compact in size, the R&S®SGT100A has excellent RF characteristics (e.g. signal quality and level accuracy) that are on par with those of larger high-end instruments. Maximum output level, level repeatability and excellent EVM performance are key characteristics in production environments.


Thanks to its flexible customization concept, options can be easily added and configured via key codes, allowing customers to directly unlock additional functionalities and easily respond to various production requirements. Easy maintenance and a three-year calibration cycle help keep total cost of ownership to a minimum.

Equipped with a LAN, USB and PCIe interface, the R&S®SGT100A allows remote control of test equipment in automated applications.

On the front panel, LEDs indicate the generator's operating status and pushbuttons allow users to operate the basic functions. The R&S®WinIQSIM2 simulation software makes it easy to generate test signals in line with different digital standards such as 5G, IEEE 802.11 wireless LAN or LoRa and directly upload them to the R&S®SGT100A. The supplied R&S®SGMA-GUI PC software can be used for manual operation.

Key facts

- ▶ Fastest vector signal generator with frequency and level switchover times of 240 µs (typ.) for optimized throughput in production
- ▶ Smallest standalone vector signal generator up to 6 GHz with integrated baseband generator (1 HU, ½ 19")
- ▶ Integrated baseband generator with I/Q modulation bandwidth of up to 240 MHz (in RF) supporting all advanced digital standards, including IEEE 802.11ac
- ▶ Excellent RF performance for EVM and ACLR
- ▶ Easy signal generation for digital standards such as 5G and WLAN using the R&S®WinIQSIM2 simulation software
- ▶ Ideal enhancement for the R&S®SMW200A in MIMO applications with more than two receiving antennas

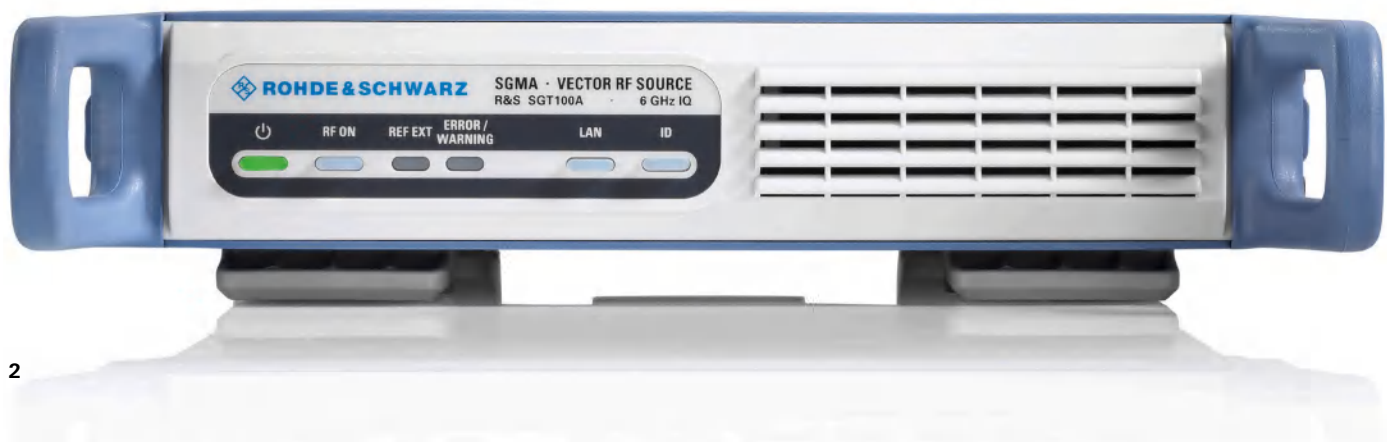

BENEFITS AND KEY FEATURES

Optimized for use in production

- ▶ Smallest standalone vector signal generator with integrated baseband generator
- ▶ Fast frequency and level switchover to optimize production throughput
- ▶ High output level to compensate for losses in the test system
- ▶ Low power consumption for reduced heat dissipation and simplified thermal management within the system
- ▶ [page 4](#)

The right signal performance in the right package

- ▶ Excellent modulation accuracy for large test margins
- ▶ Outstanding frequency response due to integrated baseband generator
- ▶ Low phase noise of -133 dBc (typ.) at 1 GHz and 20 kHz offset (1 Hz measurement bandwidth)
- ▶ Excellent level repeatability and level linearity for outstanding reproducibility of measurements
- ▶ Optional high-performance oven-controlled crystal oscillator for easy integration into test system
- ▶ Ideal enhancement for the R&S®SMW200A in MIMO applications with more than two antennas
- ▶ Optional analog I/Q outputs enabling full-featured envelope tracking testing capabilities
- ▶ [page 6](#)

Low cost of ownership

- ▶ Low acquisition costs
- ▶ Simple modular design for easy servicing
- ▶ Easily upgradeable at customer premises
- ▶ Waveform package as ideal production solution
- ▶ Many remote control interfaces for easy integration into the test setup
- ▶ R&S®SGMA-GUI PC software
- ▶ [page 11](#)

Overview of R&S®SGT100A applications

| | Standalone vector signal generator | Extension for R&S®SMW200A as additional RF source |
|------------------------|---|---|
| Frequency range | | 1 MHz to 3 GHz 1 MHz to 6 GHz (with R&S®SGT-KB106) |
| ARB baseband generator | 32 Msample memory and 60 MHz RF bandwidth (with R&S®SGT-K510) | n.a.; digital I/Q data is transferred from R&S®SMW200A (requires R&S®SGT-K18 digital interface option) |
| Memory | up to 1 Gsample (with R&S®SGT-K511 and R&S®SGT-K512) | n.a. |
| RF bandwidth | up to 240 MHz (with R&S®SGT-K521, R&S®SGT-K522 and R&S®SGT-K523) | up to 160 MHz |
| Analog I/Q outputs | available with R&S®SGT-K16 | n.a. |

OPTIMIZED FOR USE IN PRODUCTION

Smallest standalone vector signal generator with integrated baseband generator

Its space-saving design makes the R&S®SGT100A ideal for use in any test system. The compact R&S®SGT100A is a complete vector signal generator with a frequency range of up to 6 GHz and an integrated high-performance baseband generator. It can generate digital RF signals with an I/Q modulation bandwidth of up to 240 MHz (in RF) and supports all common digital standards.

The large memory depth of up to 1 Gsample allows long signal sequences and can also store many different signals to minimize switchover times. The multisegment waveform mode makes it possible to switch over between up to 100 different signals within microseconds. Should other additional test signals be required, the standard solid-state drive (SSD) speeds up reloading.


Fast frequency and level switchover to optimize production throughput

For automated tests, the time it takes to switch frequencies and levels is a key characteristic, especially when using the frequency and level to calibrate or characterize DUTs such as amplifiers. In addition to LAN and USB, the R&S®SGT100A features a PCIe interface for remote control to achieve maximum speed. To accelerate remote control command processing, the R&S®SGT100A supports fast, direct commands for the most important settings such as frequency and level. These commands enable direct access to the internal architecture, which has been optimized for maximum speed.

High output level to compensate for losses in the test system

Though compact in size, the R&S®SGT100A achieves a maximum output level of +22 dBm (typ.). Such a high level is important in a test system to compensate for losses that arise in cabling and signal paths.

The maximum level delivered by the R&S®SGT100A can eliminate the need for an additional amplifier in the system, which saves cost and space, simplifying system calibration and ensuring unimpaired signal quality. Thanks to its high output power, the R&S®SGT100A can also be used as a modulated interferer.

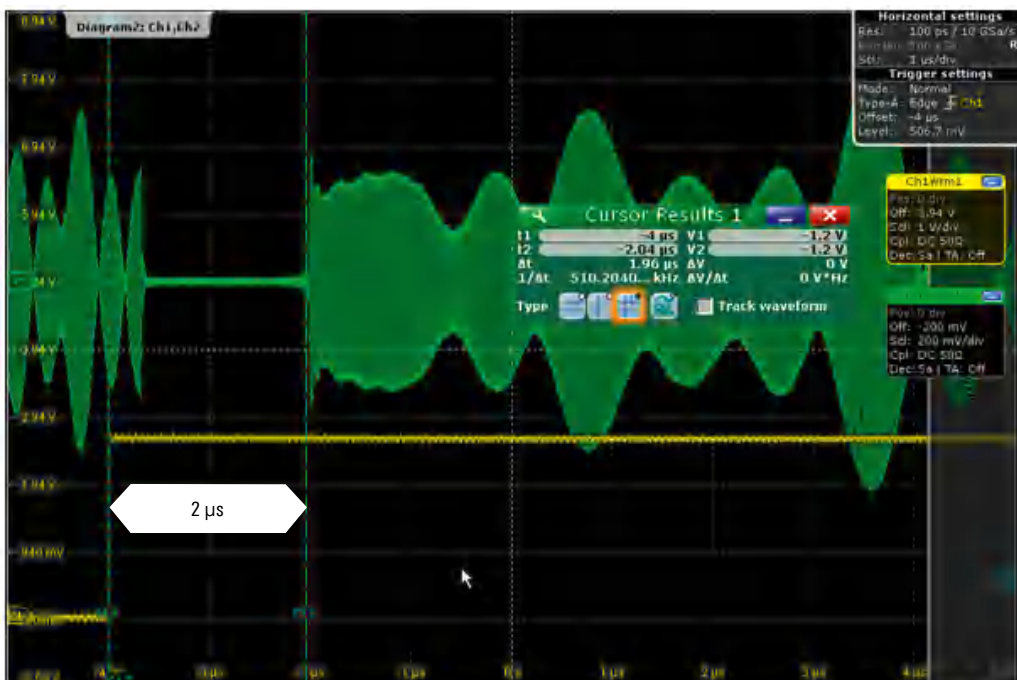

Measured delay of 2 μs for switching between signals using the multisegment waveform mode, a WCDMA test signal at 30.72 MHz sample rate

Low power consumption for reduced heat dissipation and simplified thermal management within the system


The low 65 W power consumption cuts operating costs and reduces heat dissipation. Low heat dissipation simplifies the test system's thermal management and allows a high packing density for the generators.

Now four full-fledged vector signal generators can fit into a 2 HU, 19" space, the same space previously required for a single RF path.


Standard connectors on the rear panel allow easy integration into the test system since all the cables are routed at the back of the rack.

LEDs on the front panel indicate the current status of basic characteristics and the generator itself. Pushbuttons allow a LAN reset and also provide access to an identification aid that makes it easier to connect more than one instrument to the test software.

Maximum available level in CW mode, setting characteristic: auto

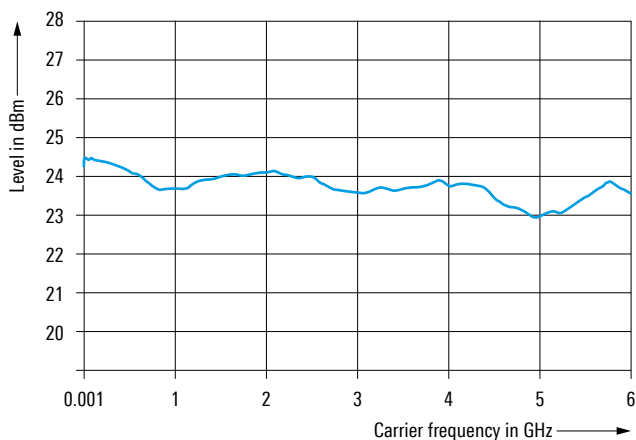

Histogram of the level setting times via the PCIe interface

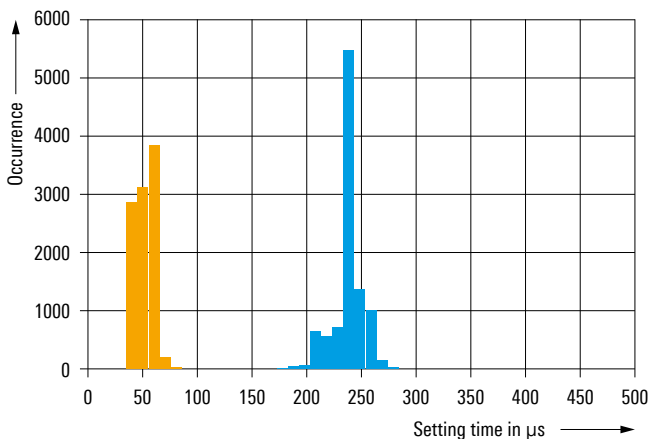


I/Q modulation from internal baseband,
setting characteristic: auto

- ▶ Orange: with digital attenuation
- ▶ Blue: with arbitrary level setting

THE RIGHT SIGNAL PERFORMANCE IN THE RIGHT PACKAGE

Excellent modulation accuracy for large test margins

Signal performance is crucial when it comes to offering the right instrument for production applications. This is where the R&S®SGT100A excels: it achieves an extremely low error vector magnitude (EVM) of 0.4% when testing devices for compliance with IEEE802.11ac (with 160 MHz RF bandwidth and higher-order 256QAM modulation). Its performance enables larger test margins and achieves higher yields in production.

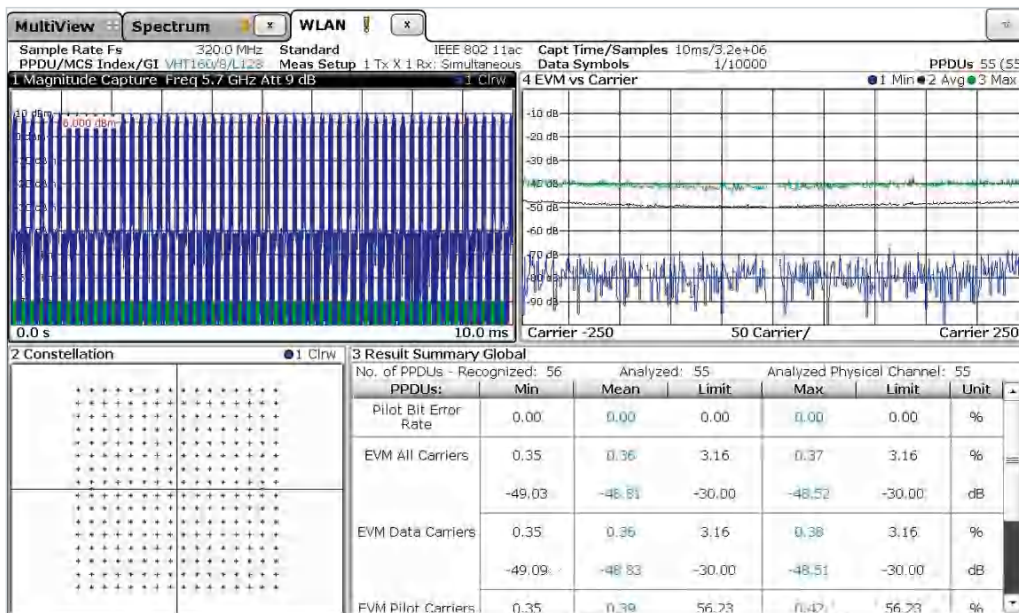

IEEE 802.11ac signals with 160 MHz bandwidth and an EVM of -48 dB

Outstanding frequency response due to integrated baseband generator


The very flat frequency response over a bandwidth of 240 MHz makes the R&S®SGT100A flexible and ideal for a wide range of applications. A deviation of just 0.1 dB over the entire range clearly reveals why an internal baseband that is perfectly matched to the RF module is a real plus. Other features such as frequency offsets in the baseband, high signal bandwidths and LTE carrier aggregation also benefit from this linearity.

Low phase noise of -133 dBc (typ.) at 1 GHz and 20 kHz offset (1 Hz measurement bandwidth)


The excellent performance of the R&S®SGT100A is due to the low phase noise because phase noise directly influences the accuracy of the constellation points of a digital modulation scheme.

Except for vector signals, low phase noise is essential for receiver tests, especially intermodulation tests, to ensure that the interfering signal is only transmitting in the intended frequency range. This is vital for a generator, which should be flexible enough to generate modulated or CW interferers and a clean LO in addition to digital signals.

Measured frequency response across the maximum modulation bandwidth of 240 MHz at different carrier frequencies

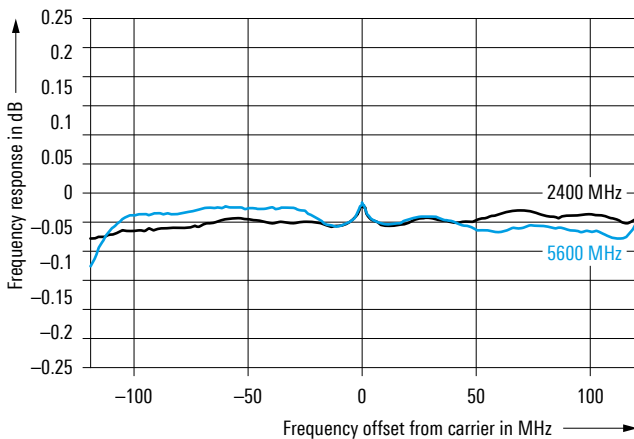

Measured SSB phase noise with the R&S®SGT-B1 internal OCXO option

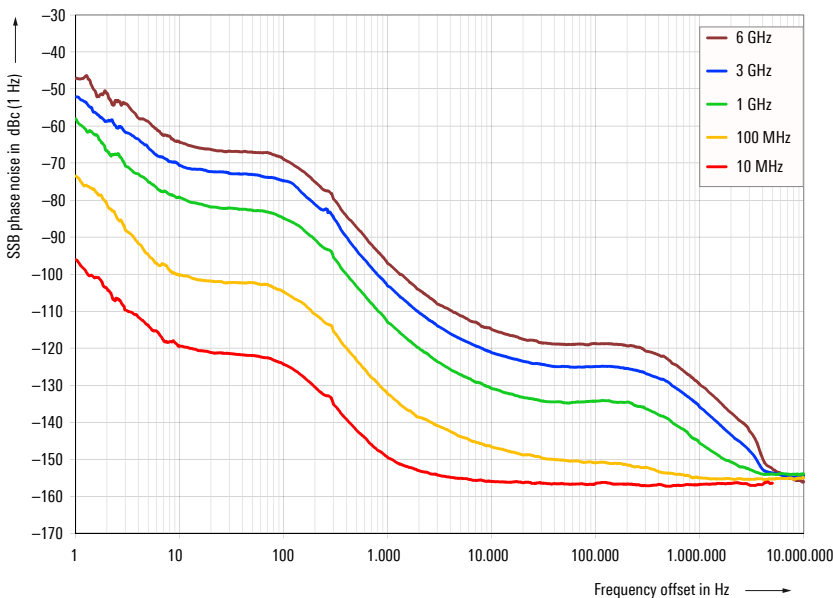

Excellent level repeatability and level linearity for outstanding reproducibility of measurements

In production environments, the level to the DUT over the entire system is typically calibrated to take out any effects of components between the generator and the DUT. Consequently, an RF generator's level repeatability is more important than its absolute level accuracy when it comes to ensuring that a one-time calibration of the entire system remains valid for a long time in order to maximize uptime.


Level linearity is also crucial in tests with swept level (e.g. finding the 1 dB compression point in amplifiers) as the input signal fed into the DUT is swept over the entire frequency range of interest. What really matters here is precise step size, which is what the R&S®SGT100A delivers.

Optional high-performance oven-controlled crystal oscillator for easy integration into test system

Typically, all test instruments in a system are synchronized using a 10 MHz reference. The R&S®SGT100A offers an optional high-performance oven-controlled crystal oscillator to provide a stable and precise 10 MHz reference without taking up additional rack space.

The R&S®SGT100A can also be synchronized via a 13 MHz, 100 MHz or even a 1 GHz reference frequency. A much higher reference frequency makes coupling more direct and provides higher phase stability between the RF signals. The R&S®SGT-K90 option is ideal for high-precision phase stability tests in beamforming applications, offering fixed LO-RF signal coupling between different devices.

Measured level linearity for an internally generated LTE uplink signal at various test frequencies

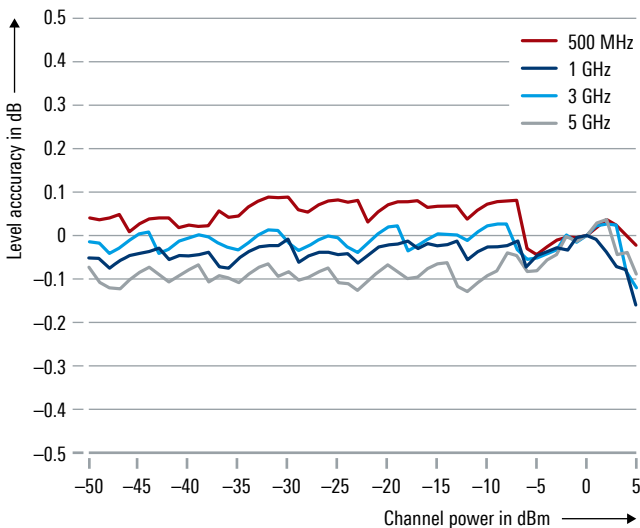

Ideal enhancement for the R&S®SMW200A in MIMO applications with more than two antennas

Its solid performance makes the R&S®SGT100A the ideal enhancement for the high-end R&S®SMW200A vector signal generator in MIMO applications. For higher-order MIMO setups (such as 4x4 with LTE or 2x8 with TD-LTE), it is necessary to feed four or even eight signals into the input ports of a base station.

The R&S®SMW200A provides the required baseband signals and real-time fading for the MIMO channels. The R&S®SMW200A provides two RF ports, and up to six R&S®SGT100A vector RF sources can be connected to provide up to six additional ports. The instruments are connected via a digital interface to ensure top quality of all signals used for testing a base station. Such a setup requires no additional software because the R&S®SGT100A, once connected via LAN or USB, can be fully controlled from the user interface of the R&S®SMW200A.



Setup with one R&S®SMW200A and six R&S®SGT100A for 2x8 MIMO applications as used for TD-LTE

Optional analog I/Q outputs enabling full-featured envelope tracking testing capabilities

Despite the small size, the R&S®SGT100A offers four SMB connectors on the rear of the instrument that provide the differential analog I/Q output signals with a bandwidth of up to 120 MHz.

The R&S®SGT100A is the ideal solution for power amplifier tests due to its speed, size and performance. To support the testing of envelope tracking power amplifiers (PA), an additional envelope signal synchronous to the RF signal needs to be generated.


With the future-ready R&S®SGT100A, this is an easy task since the required software options can be upgraded later

without the need for additional hardware. For full flexibility, two different configurations are offered:


Equipped with the R&S®SGT-K540 option, the R&S®SGT100A calculates the envelope signal in real-time. This unique feature offers the advantage of test time reduction since no manual calculation of the envelope waveform is required.

The second possibility, which allows the use of customer envelope waveform files, is to split the ARB into two independent digital basebands (requires R&S®SGT-K543). This approach combines two instruments into one. A vector signal generator for the RF signal and an arbitrary waveform generator for the synchronized envelope signal.

Concept of real-time envelope tracking tests with R&S®SGT-K540

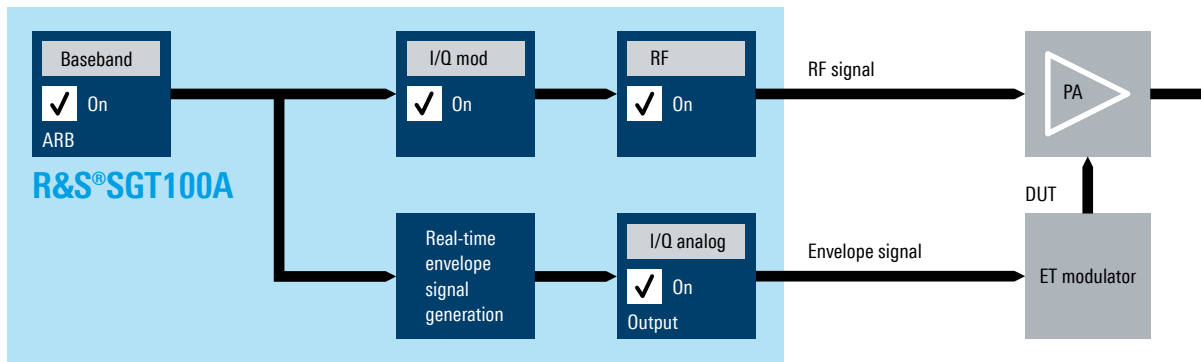

Concept of split ARB envelope tracking tests with R&S®SGT-K543

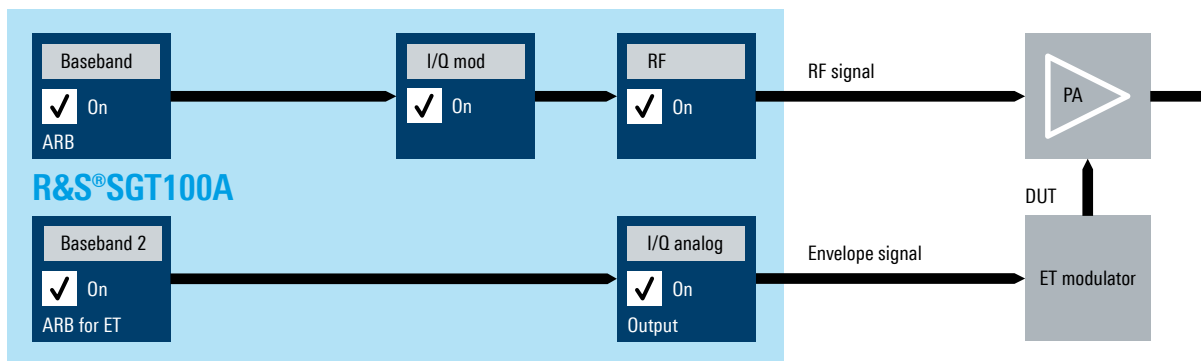

Interfaces on the rear panel of the R&S®SGT100A



LOW COST OF OWNERSHIP

Low acquisition costs

The total cost of ownership incurred for a product involves many different aspects. Beyond the initial costs, the generator's low power consumption of just 65 W also saves money in two ways. First, it reduces the power bills. Second, it dissipates less heat, simplifying the test system's thermal management.

Simple modular design for easy servicing

The R&S®SGT100A consists of just a few modules, making it easy and inexpensive to repair in the unlikely event that a problem occurs.

The built-in test supports the service process, helping to get the instrument back into operation as fast as possible.

The recommended three-year calibration interval ensures that the instrument does its job as long as possible and rarely has to be serviced, which in turn reduces the total cost of ownership.

Easily upgradeable at customer premises

The R&S®SGT100A offers an impressively flexible customization concept with just one hardware option (the oven-controlled crystal oscillator). All other options can be easily added at the customer premises using key codes – e.g. from 3 GHz to 6 GHz¹⁾ or to a larger bandwidth. This saves cost and time and maximizes system uptime.

¹⁾ The R&S®SGT100A is calibrated up to 6 GHz at the plant. If the generator is upgraded at a later point in time, it is recommended to recalibrate it up to 6 GHz.



Inside view of the R&S®SGT100A

Waveform package as ideal production solution

Characterizing DUTs in production often requires using test signals from a number of different standards. In addition to wireless communications standards such as GSM, 3GPP FDD and LTE, today's chipsets also support connectivity systems such as NFC, Bluetooth® or WLAN.


The waveform package is the ideal solution when it comes to inexpensively providing a signal for each standard and to licensing test signals on the R&S®SGT100A in line with these standards. A waveform package for five signals, for example, can generate one signal each for GSM, EDGE, 3GPP FDD, HSPA+ and LTE to test an amplifier.

Many remote control interfaces for easy integration into the test setup

In addition to USB and Gigabit-LAN, the R&S®SGT100A comes with a PCIe interface for remote control as used in computers. This maximizes data throughput for remote control commands, speeds up waveform downloads and allows very short setting times for various commands, such as those used to change the level, frequency or digital signal.

R&S®SGMA-GUI PC software

The R&S®SGMA-GUI PC software, which comes with the instrument, is used for manual operation. It can simultaneously control up to twelve R&S®SGT100A sources and also provides access to all instrument functions and settings via all interfaces.

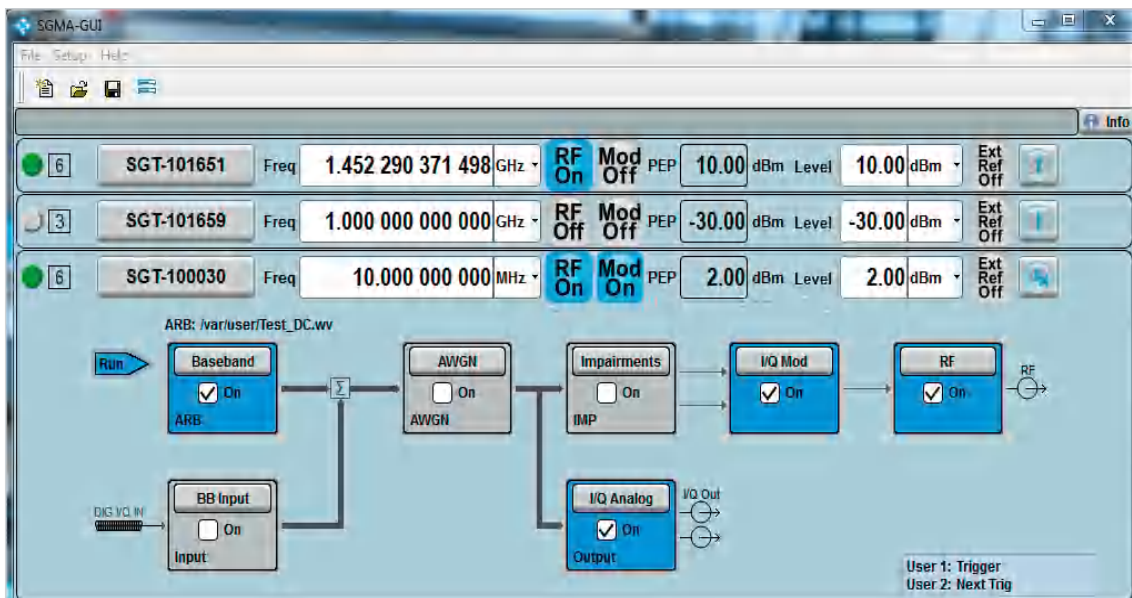

Screenshot of the R&S®SGMA-GUI PC software for controlling up to twelve instruments

SPECIFICATIONS IN BRIEF

| Specifications in brief | | |
|---|---|---|
| Frequency | | |
| Frequency range | CW mode and I/Q mode with the R&S®SGT-KB106 option CW mode and I/Q mode | 1 MHz to 3 GHz 1 MHz to 6 GHz |
| Setting time | with PCIe/Ethernet remote control | < 500 µs |
| Input frequency for external reference | into the R&S®SGT100A | 10 MHz, 13 MHz, 100 MHz, 1000 MHz |
| Level | | |
| Specified level range | | -120 dBm to +17 dBm (PEP) ¹⁾ |
| Setting time | with PCIe/Ethernet remote control, setting characteristic: auto | < 500 µs |
| Spectral purity | | |
| Harmonics | level ≤ 8 dBm, CW, I/Q wideband off | < -30 dBc |
| Nonharmonics | level > -10 dBm, offset > 10 kHz from carrier, f ≤ 1.5 GHz | < -76 dBc |
| Wideband noise | 10 MHz carrier offset, level > 5 dBm, 1 Hz measurement bandwidth, CW | < -145 dBc |
| SSB phase noise | 20 kHz carrier offset, 1 Hz measurement bandwidth | |
| | f = 1 GHz | < -126 dBc, -133 dBc (typ.) |
| | f = 6 GHz | < -110 dBc, -117 dBc (typ.) |
| Pulse modulation | | |
| On/off ratio | | optional, with the R&S®SGT-K22 option > 80 dB |
| Minimum pulse width | using the integrated pulse generator | 20 ns |
| I/Q modulation | | |
| I/Q modulator bandwidth (RF) | with an external analog signal | |
| | 100 MHz < f ≤ 2.5 GHz, I/Q wideband | 20% of carrier frequency |
| | 2.5 GHz < f ≤ 6 GHz, I/Q wideband | 1 GHz |
| | with the integrated baseband source | 60 MHz |
| | with the R&S®SGT-K521 option | 120 MHz |
| | with the R&S®SGT-K521 and R&S®SGT-K522 options | 160 MHz |
| | with the R&S®SGT-K521, R&S®SGT-K522 and R&S®SGT-K523 options | 240 MHz |
| Waveform length | | |
| | with the R&S®SGT-K511 option | 1 sample to 32 Msample, in one-sample steps |
| | with the R&S®SGT-K511 and R&S®SGT-K512 options | 1 sample to 256 Msample, in one-sample steps |
| Sample resolution | equivalent to D/A converter | 16 bit |
| ACLR | WCDMA 3GPP FDD, TM 1-64 | > 68 dB, 71 dB (typ.) |
| Waveform changeover time in multisegment waveform mode | | |
| EVM | 50 MHz clock rate (external trigger, without clock change) | 5 µs (meas.) |
| | IEEE802.11ac, 160 MHz, MCS 9 | 0.4% (typ.) |
| Supported standards with R&S®WinIQSIM2 ¹⁾ | with additional options | LTE, WCDMA, HSPA/HSPA+, GSM/EDGE/EDGE Evolution, TD-SCDMA, CDMA2000®/1xEV-DO, TETRA, IEEE802.11a/b/g/n/p/ac/ax/be, IEEE802.16, Bluetooth®, NFC, LoRa, DVB-H/DVB-T, DAB/T-DMB, GPS, Galileo, GLONASS, BeiDou |
| Remote control | | PCIe (single lane), Ethernet (TCP/IP) 10/100/1000BASE-T, USB 2.0 |
| General data | | |
| Power consumption | | 65 W (meas.) |
| Dimensions | W × H × D, per unit | 250 mm × 52.5 mm × 401 mm (9.84 in × 2.07 in × 15.79 in); 1 HU, ½ 19" rack width |
| Weight | when fully equipped, per unit | 4.0 kg (8.82 lb) |
| Recommended calibration interval | 40 h/week operation in the full range of the specified environmental conditions | 3 years |

¹⁾ R&S®WinIQSIM2 requires an external PC.

ORDERING INFORMATION

| Designation | Type | Order No. |
|--|---------------|--------------|
| SGMA vector RF source, 1 MHz to 3 GHz RF, baseband hardware included | R&S®SGT100A | 1419.4501.02 |
| Including power cable and quick start guide | | |
| RF options | | |
| Frequency extension to 6 GHz | R&S®SGT-KB106 | 1419.5708.02 |
| Reference oscillator OCXO | R&S®SGT-B1 | 1419.5608.02 |
| Extension unit | R&S®SGT-B88 | 1419.8207.02 |
| Pulse modulation | R&S®SGT-K22 | 1419.6279.02 |
| Phase coherent input/output | R&S®SGT-K90 | 1419.6333.02 |
| Baseband options | | |
| Differential analog I/Q outputs | R&S®SGT-K16 | 1419.8007.02 |
| Digital baseband connectivity | R&S®SGT-K18 | 1419.6240.02 |
| ARB baseband generator, 32 Msample, 60 MHz RF bandwidth | R&S®SGT-K510 | 1419.7500.02 |
| ARB memory extension to 256 Msample | R&S®SGT-K511 | 1419.6362.02 |
| ARB memory extension to 1 Gsample | R&S®SGT-K512 | 1419.6391.02 |
| ARB bandwidth extension to 120 MHz RF bandwidth | R&S®SGT-K521 | 1419.6427.02 |
| ARB bandwidth extension to 160 MHz RF bandwidth | R&S®SGT-K522 | 1419.6456.02 |
| ARB bandwidth extension to 240 MHz RF bandwidth | R&S®SGT-K523 | 1419.7952.02 |
| Envelope tracking | R&S®SGT-K540 | 1419.7800.02 |
| AM/AM, AM/PM predistortion | R&S®SGT-K541 | 1419.7852.02 |
| Envelope ARB | R&S®SGT-K543 | 1419.7900.02 |
| Crest factor reduction | R&S®SGT-K548 | 1419.8471.02 |
| Noise generation | | |
| Additive white Gaussian noise (AWGN) | R&S®SGT-K62 | 1419.6304.02 |
| Digital modulation systems using R&S®WinIQSIM2¹⁾ | | |
| GSM/EDGE | R&S®SGT-K240 | 1419.5950.02 |
| EDGE Evolution | R&S®SGT-K241 | 1419.6004.02 |
| 3GPP FDD | R&S®SGT-K242 | 1419.6056.02 |
| GPS | R&S®SGT-K244 | 1419.6104.02 |
| CDMA2000® incl. 1xEV-DV | R&S®SGT-K246 | 1419.6156.02 |
| 1xEV-DO Rev. A | R&S®SGT-K247 | 1419.6204.02 |
| IEEE802.16 | R&S®SGT-K249 | 1419.6504.02 |
| TD-SCDMA | R&S®SGT-K250 | 1419.6556.02 |
| TD-SCDMA enhanced BS/MS tests | R&S®SGT-K251 | 1419.6604.02 |
| DVB-H | R&S®SGT-K252 | 1419.6656.02 |
| DAB/T-DMB | R&S®SGT-K253 | 1419.6704.02 |
| IEEE802.11a/b/g/n | R&S®SGT-K254 | 1419.6756.02 |
| LTE Release 8 | R&S®SGT-K255 | 1419.6804.02 |
| Bluetooth® EDR | R&S®SGT-K260 | 1419.6856.02 |
| Multicarrier CW signal generation | R&S®SGT-K261 | 1419.6904.02 |
| Additive white Gaussian noise (AWGN) | R&S®SGT-K262 | 1419.6956.02 |
| Galileo | R&S®SGT-K266 | 1419.7000.02 |
| TETRA Release 2 | R&S®SGT-K268 | 1419.7052.02 |
| 3GPP FDD HSPA/HSPA+ | R&S®SGT-K283 | 1419.7100.02 |
| LTE Release 9 | R&S®SGT-K284 | 1419.7152.02 |
| LTE Release 10 | R&S®SGT-K285 | 1419.7200.02 |
| IEEE802.11ac | R&S®SGT-K286 | 1419.7252.02 |
| 1xEV-DO Rev. B | R&S®SGT-K287 | 1419.7300.02 |
| NFC A/B/F | R&S®SGT-K289 | 1419.7352.02 |
| GLONASS | R&S®SGT-K294 | 1419.7400.02 |
| NavIC/IRNSS | R&S®SGT-K297 | 1426.3388.02 |
| Modernized GPS | R&S®SGT-K298 | 1419.5766.02 |

¹⁾ R&S®WinIQSIM2 requires an external PC.

| Designation | Type | Order No. |
|--|--------------|--------------|
| BeiDou | R&S®SGT-K407 | 1419.7452.02 |
| LTE Release 11 | R&S®SGT-K412 | 1419.7600.02 |
| LTE Release 12 | R&S®SGT-K413 | 1419.8159.02 |
| OFDM signal generation | R&S®SGT-K414 | 1419.8188.02 |
| Cellular IoT Release 13 | R&S®SGT-K415 | 1426.3607.02 |
| DVB-S2/DVB-S2X | R&S®SGT-K416 | 1426.3707.02 |
| Bluetooth® 5.0 | R&S®SGT-K417 | 1426.3759.02 |
| Verizon 5GTF | R&S®SGT-K418 | 1419.7781.02 |
| LTE Release 13/14/15 | R&S®SGT-K419 | 1426.3859.02 |
| Modernized GLONASS | R&S®SGT-K423 | 1426.3407.02 |
| LoRa | R&S®SGT-K431 | 1419.7881.02 |
| Modernized BeiDou | R&S®SGT-K432 | 1426.3394.02 |
| IEEE 802.11ax | R&S®SGT-K442 | 1426.3807.02 |
| Cellular IoT Release 14 | R&S®SGT-K443 | 1419.7752.02 |
| 5G NR Release 15 | R&S®SGT-K444 | 1419.5908.02 |
| Cellular IoT Release 15 | R&S®SGT-K446 | 1419.8171.02 |
| IEEE 802.11be | R&S®SGT-K447 | 1419.7775.02 |
| 5G NR Release 16 | R&S®SGT-K448 | 1419.8036.02 |
| 5G NR Sidelink | R&S®SGT-K470 | 1419.7075.02 |
| 5G NR Release 17 | R&S®SGT-K471 | 1426.3165.02 |
| Waveform package for signals from R&S®WinIQSIM2¹⁾, R&S®Pulse Sequencer and R&S®Pulse Sequencer DFS | | |
| 1 waveform | R&S®SGT-K200 | 1419.5850.71 |
| 5 waveforms | R&S®SGT-K200 | 1419.5850.72 |
| 50 waveforms | R&S®SGT-K200 | 1419.5850.75 |
| Digital standards using an external PC software or waveforms | | |
| Pulse sequencing | R&S®SGT-K300 | 1419.7652.02 |
| Enhanced pulse sequencing | R&S®SGT-K301 | 1419.7700.02 |
| Direction finding | R&S®SGT-K308 | 1419.7730.02 |
| DFS signal generation | R&S®SGT-K350 | 1419.8107.02 |
| Recommended extras | | |
| Documentation of calibration values | R&S®DCV-2 | 0240.2193.18 |
| Hardcopy manuals (in English) | | 1176.8674.02 |
| 19" rack adapter (for two 1 HU instruments next to each other, suitable for installation of two R&S®SGMA instruments) | R&S®ZZA-KN20 | 1175.3191.00 |
| 19" rack adapter (for one instrument and spacing module, without R&S®SGT-B88 option) | R&S®ZZA-KN21 | 1175.3204.00 |
| 19" rack adapter (for one instrument and spacing module, with R&S®SGT-B88 option) | R&S®ZZA-KN23 | 1175.3227.00 |
| R&S®SGMA adapter | R&S®SGS-Z8 | 1416.2914.02 |
| R&S®SGT adapter cable set | R&S®SGT-Z9 | 1419.8059.02 |

| Warranty | | |
|---|---------|---|
| Base unit | | 3 years |
| All other items ²⁾ | | 1 year |
| Service options | | |
| Extended warranty, one year | R&S®WE1 | Please contact your local Rohde&Schwarz sales office. |
| Extended warranty, two years | R&S®WE2 | |
| Extended warranty with calibration coverage, one year | R&S®CW1 | |
| Extended warranty with calibration coverage, two years | R&S®CW2 | |
| Extended warranty with accredited calibration coverage, one year | R&S®AW1 | |
| Extended warranty with accredited calibration coverage, two years | R&S®AW2 | |

¹⁾ R&S®WinIQSIM2 requires an external PC.

²⁾ For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde&Schwarz is under license. CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA - USA). NFC Forum and the NFC Forum logo are trademarks of the Near Field Communication Forum.

Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde&Schwarz technology group is among the trail-blazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks&cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

