


标准3m法电波暗室 Standard 3m anechoic chamber

主要由3m法主暗室、控制室和功放室组成（亦可配置传导测试室）。主要用于3m测试距离的辐射骚扰测试和辐射敏感度的认证性测试，被试品尺寸在2m以下。具有多种测试功能和用途，具备从半波暗室（有接地平面）升级到全波暗室（地板铺设吸波材料）的能力。

It is mainly composed of 3m main darkroom, control room and power amplifier room (conduction test room can also be configured). It is mainly used for radiation disturbance test at 3m test distance and certification test of radiation sensitivity. The size of the tested object is less than 2m. It has a variety of testing functions and uses, and has the ability to upgrade from a half wave anechoic chamber (with a grounding plane) to a full wave anechoic chamber (with a floor paved with absorbing materials).

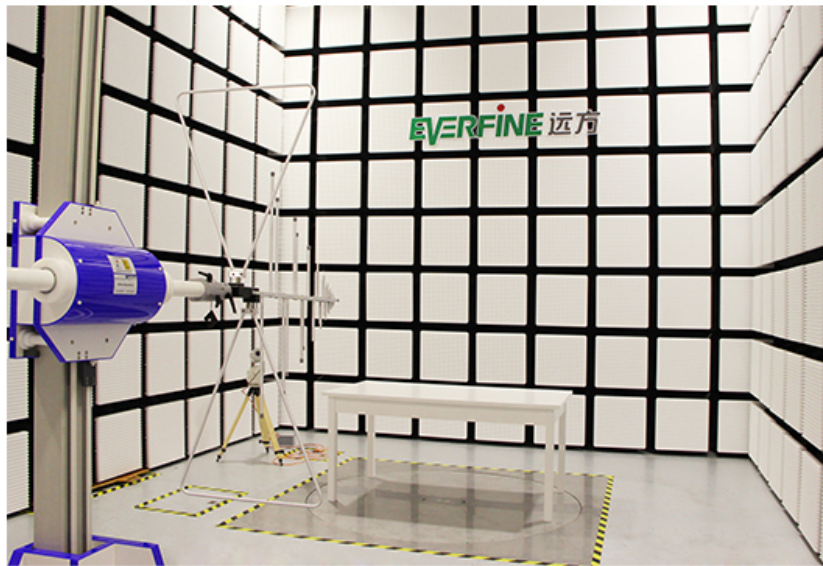

技术参数 Specifications

• 符合标准:

CISPR11

CISPR14

CISPR15

CISPR2

IEC/EN61000-4-3

型号	标准 3m 法电波暗室
外形尺寸	9.2m×6.2m×6.2m
频率范围	30MH-18GHz
测量距离	3.0m