

## HACA-3800H 高精度分光测色仪(基准级) HACA-3800H high-precision spectrophotometer (reference level)


- HACA-3800H高精度颜色分析仪采用先进的光谱测量技术、双光束反馈光学系统，适用于纺织，塑料，染料，涂料和消费电子等行业的物体颜色和各类荧光色的高精度测量，是反射和透射测量的高端机型。

HACA-3800H high-precision color analyzer adopts advanced spectral measurement technology and double beam feedback optical system, which is suitable for high-precision measurement of object color and various fluorescent colors in textile, plastic, dye, paint, consumer electronics and other industries. It is a high-end model for reflection and transmission measurement.



**特点与优势 Characteristics and advantage**

- 照明观测几何：兼顾反射测量和透射测量，照明观测几何完全符合CIE、ISO、ASTM、DIN、JIS、GB/T等国际及国内测色标准要求；  
Lighting observation geometry: give consideration to reflection measurement and transmission measurement, and the lighting observation geometry fully complies with the requirements of CIE, ISO, ASTM, DIN, JIS, GB/T and other international and domestic color measurement standards;
- 反射：d/8（漫射照明/8°接收）SCI/SCE同步测量  
Reflection: d/8 (diffuse illumination/8° reception) SCI/SCE synchronous measurement
- 透射：d/0（漫射照明/0°接收）  
Transmission: d/0 (diffuse illumination/0° reception)

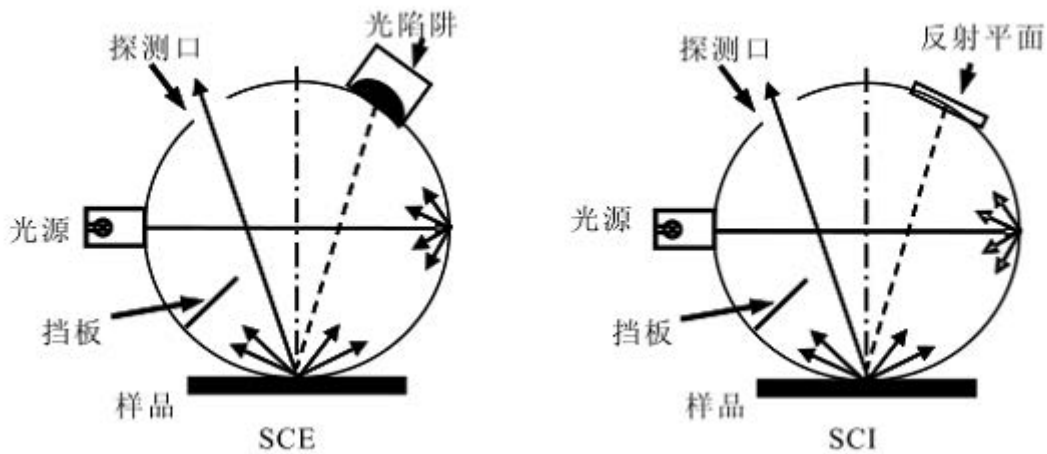


- 颜色测量精度高：近30年光谱仪研发生产经验，数十项专利技术，使系统具有优异的分光测色性能，颜色测量精度高，重复性好，器件差小。  
High color measurement accuracy: nearly 30 years of spectrometer R&D and production experience and dozens of patented technologies have enabled the system to have excellent spectral color measurement performance, high color measurement accuracy, good repeatability and small device difference.



**特点与优势 Characteristics and advantage**

- 双光束反馈光学系统：实时监控和补偿光源波动，减少由于亮度变化或光谱特征变化引起的测量误差。  
Double beam feedback optical system: real-time monitoring and compensation of light source fluctuations to reduce measurement errors caused by changes in brightness or spectral characteristics.
- 系统灵敏度高，深色域测量重复性表现优异：以10s为间隔测量反射率1%黑板30次光谱反射率标准偏差仍可保持在0.1%以内。  
The system has high sensitivity and excellent repeatability of dark color domain measurement: the standard deviation of 30 times spectral reflectance of the blackboard with a reflectance of 1% measured at 10s interval can still be kept within 0.1%.
- 精确模拟D65标准照明体，日光匹配好，寿命长，稳定性好。  
Precise simulation of D65 standard lighting body, good daylight matching, long service life and good stability.
- 内置预览窗口，可以精确定位待测区域；  
Built in preview window, which can accurately locate the area to be measured;
- 在测量荧光材料时，无需UV校正即可实现荧光色的精确测量  
When measuring fluorescent materials, accurate measurement of fluorescent color can be achieved without UV correction

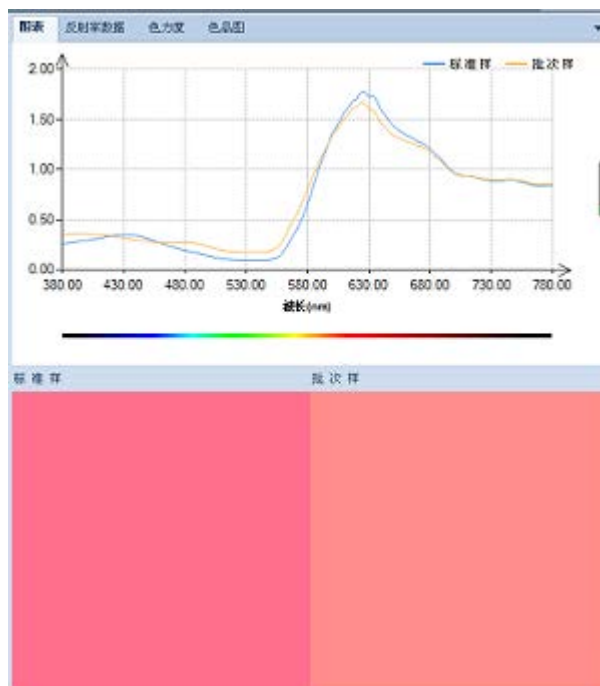

**特点与优势 Characteristics and advantage**



- 高精度的颜色测量与云平台管理  
High precision color measurement and cloud platform management
- 数据阅读更直观  
多功能管理分析软件：包含色差、反射率、透射率、色力度测量以及统计分析功能  
More intuitive data reading  
Multifunctional management and analysis software: including color difference, reflectivity, transmittance, color intensity measurement and statistical analysis functions

光源名称	L*	a*	b*	Ck	h	D65/2000
D95_100% 100%g	34.130	39.430	19.668	44.32	35.75	3.09
D95_100% 1...	35.290	41.770	21.718	47.08	27.47	3.09
E 90%g	34.240	38.300	20.128	43.29	27.70	3.09

测试数据列表



测试界面菜单栏



数据及图形对比



颜色数据



色差



反射率数据及曲线



色空间

## 技术参数 Specifications

型号	HACA-3800H
测量几何	反射: d/8(漫射照明/8°接收); 透射: d/0(漫射照明/0°接收)
观察光源	A,C,D50,D65,F1,F2,F3,F6,F7,F10,F11,F12,ID50,ID65.
测量功能	颜色、色差、光谱反射率曲线、光谱透射率曲线等
色空间	L*a*b、L*C*h、Yxy、Luv、Hunter Lab 、XYZ、RGB 等
色差	$\Delta E^*ab$ 、 $\Delta E^*94$ 、 $\Delta E^*00$ 、CMC (2: 1)、CMC (1: 1)
其他色度参数	MI、WI (ASTM313/CIE)、YI (ASTM 313/ASTM D1925) 等
波长范围	360-780nm
反射率范围	0-200%，分辨率 0.01%
重复性	光谱反射率标准偏差小于 0.1%；色度标准偏差 $\Delta E^*ab$ 小于 0.01
台间差	0.08 $\Delta E^*ab$