


(PATENTED) DISSOLVED OXYGEN (D.O.) PEN




84131

Patented Design

Clever design to ensure you always get reading from water not from sand

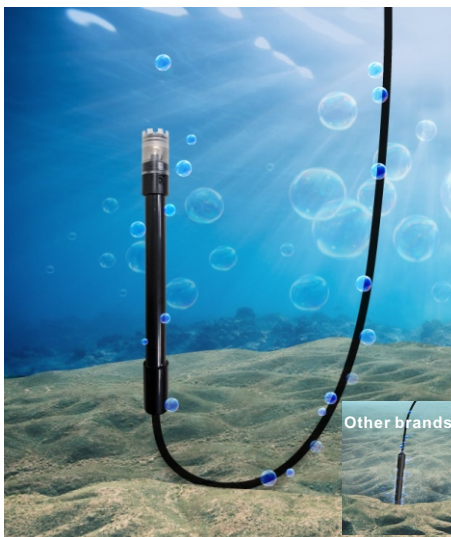


Standard:



D.O. REPLACEMENT PROBE

P/N: VZ84131PAZ
 Size: 15(dia.) x 175mm(l)
 Cable length: 3 meters
 2 pieces of spare membrane kits are included with each probe

Optional:

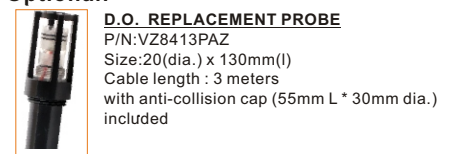

D.O. REPLACEMENT PROBE



P/N: VZ8413PAZ
 Size: 20(dia.) x 130mm(l)
 Cable length: 3 meters
 with anti-collision cap (55mm L * 30mm dia.) included

Ordering Code

VZ84131AZ, 84131 meter w/D.O. Probe
VZ84131PAZ, 3M long cable floating D.O probe for 84131/8413, w/ 2 spare membrane kits.
VZ8413PAZ, 3M long cable D.O probe with protection cap for 84131/8413, w/ 2 spare membrane kits.

Dissolved Oxygen Pen w/ long cable floating probe 84131

- Big LCD with D.O. & Temperature display
- 100% D.O. calibration in air. Chemical is not required
- Easy replaceable thin membrane kit with high sensitivity
- Refill electrolyte quickly. Simple to maintain
- Selectable % and mg/L unit for D.O. Value
- °C/°F automatic temperature compensation built-in
- Manual salinity and barometric pressure compensation
- Environment green re-chargable battery via type C port
- Brightness adjustable backlight for dark places

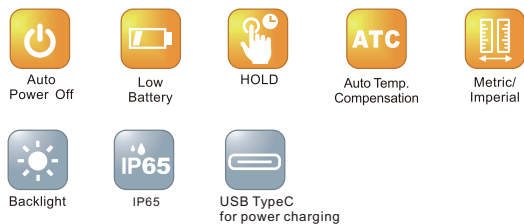

Model	84131
DO range (in mg/L)	0.00~20.00 mg/L
DO accuracy	+/-0.4 mg/L
DO resolution	0.01 mg/L
DO range (in %)	0.0~100.0
DO accuracy	+/-3% F.S
DO resolution	0.1 %
Temp. range	0~40.0°C/32~104°F
Temp. accuracy	+/-0.5°C/0.9°F
Temp. resolution	0.1°C
Manual Compensation	INCLUDED
Salinity range	0.0~45.0 ppt
Salinity res.	0.1 ppt
Barometric pressure	500~760mmHg/101.3~66.7Kpa
Pressure res.	1mmHg/0.1KPa
LCD size	30(H)x18(W)mm
Operating temp.	0~40°C
Operating RH%	Humidity<85%
Storage temp.	0~40°C
Storage RH%	Humidity < 80%
Sensor life time	>6 months (with good maintenance)
Dimension	176(L)x39(W)x39(H)
Weight	265g
Battery	3.7V@500mAh re-chargable battery
Power consumption	60 hours operation (no backlight condition)
Re-charging time	1.5 hours

Standard Package Meter (with bat. Built-in)/floating D.O. Probe/Electrolyte /2pcs membrane kits/USB-type C charging cable/ hard carry case/manual

