

PINTEK Differential Probe

★ **High Sensitivity Model !**

DP-60HS

- **High Sensitivity Model**
x 1, x 5, x 10 Attenuation
- **1 M Ω // 10 PF Input Impedance**
- **High Frequency Operation**
x 1(30 MHz), x 5(60 MHz), x 10(60 MHz)
- **Especially For Low Voltage**
x 1(7 Vp-p), x 5(35 Vp-p), x 10(70 Vp-p)




Pintek Electronics Co., Ltd
www.pintek.com.tw

DP-60HS Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-60HS
Range (Switchable)	3 (x 1, x 5, x 10 Attenuator)
Input Impedance	1 M Ω // 10 PF
Bandwidth (-3dB)	x 1: 30 MHz, x 5: 60 MHz, x 10: 60 MHz
Maximum Operation Voltage (DC+ AC p-p)	70 Vp-p (x 1: 7 Vp-p, x 5: 35 Vp-p)
Common Mode Rejection Ratio (CMRR)	60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1MHz: > 300 : 1
Noise	\leq 1 m Vrms
Accuracy	$\leq \pm$ 2% (DCV or ACV 1 KHz)
Maximum Output Voltage	$\leq \pm$ 4 VDC or \leq 8 Vp-p
Power Source	External 9V DC Adaptor
Other	Over Range Indicator; Separated Design

ACCESSORIES:

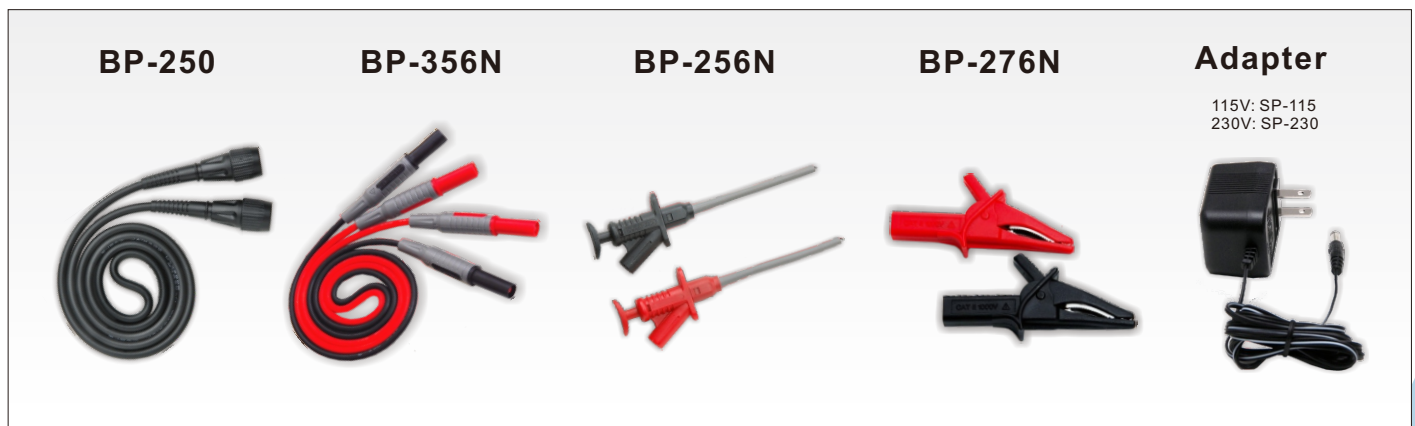

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT