

PINTEK AC/DC Current Probe

★ DC~1MHz /
2mA~70ADC, 140Ap-p



PA-677


- Max. $\pm 70\text{ADC}/140\text{Ap-p}$
- Sensitivity: $\geq 2\text{mA}$
- Bandwidth: DC~1MHz
- Rise Time: $0.35\mu\text{s}$
- Over Range Function
- 50mV/A, 500mV/A Range
- Adaptor/Battery Input
- Separating Design, Convenient Durable



Pintek Electronics Co., Ltd
www.pintek.com.tw





PA-677 AC/DC Current Probe

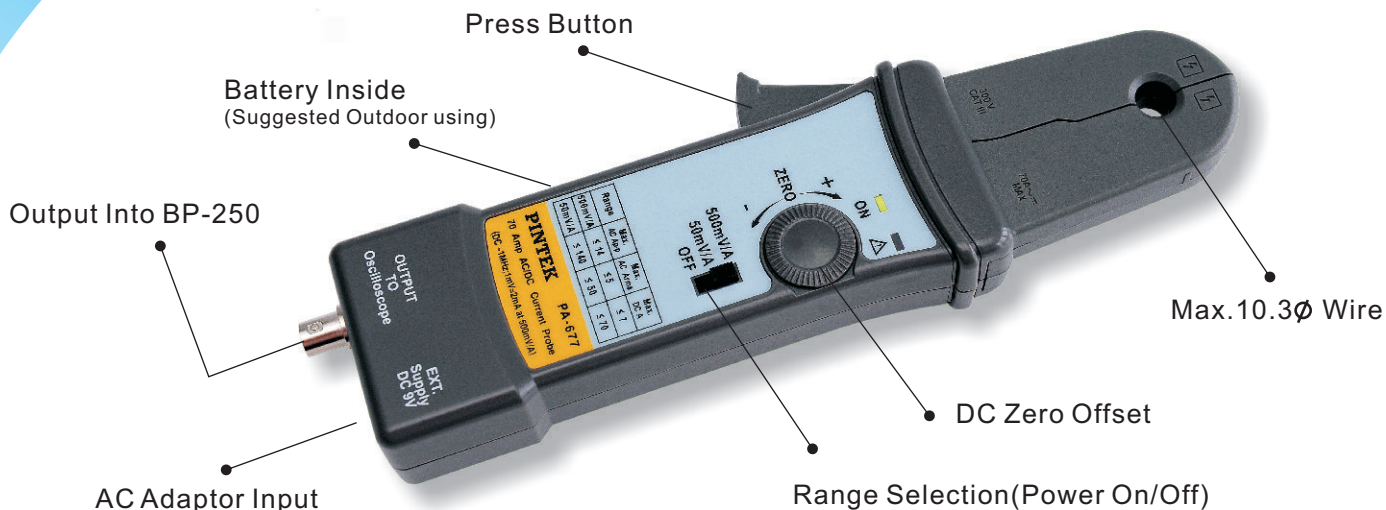


SPECIFICATIONS:

FUNCTION/MODEL	PA-677
DC Accuracy Typical	±3%: 20mA~14A peak at 500mV/A ±4%: 200mA~100A peak at 50mV/A ±15%: 100A~140A peak
Max. Working Voltage	300V CAT III
Max. Sensitivity	≥ 2 mA
Frequency Range	DC-1MHz(-3dB)
Rise Time	0.35 μS
Battery or Adaptor	9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor
Accessories	BP-250, MT-246N, Adaptor, Instruction Manual.

Waveform Comparison Between PA-677 And Other Brand In Market:

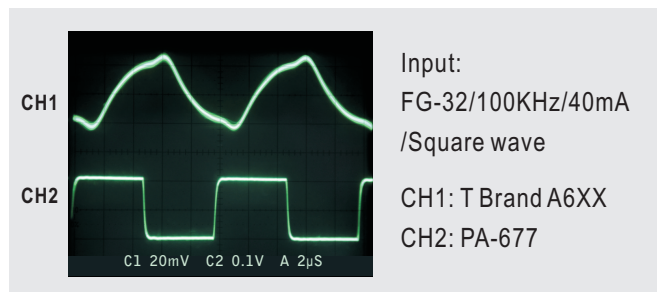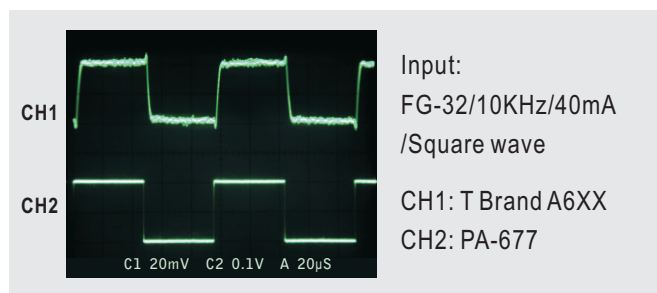

ACCESSORIES:

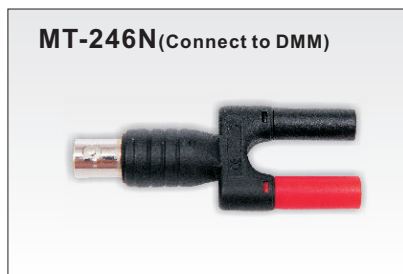

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

http://www.pintek.com.tw

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net



SALES AGENT