

PINTEK

600MHz Oscilloscope Probe

CP-3601R

FEATURES:

Bandwidth: DC-600MHz

(頻寬: DC-600MHz)

Fix x 10; Readout Function

(自動偵測讀出裝置)

EN61010-031, 600V CAT I

(符合安全規範EN61010-031.600V CAT I)

High Speed Rise Time: 0.58ns

(超高速型測試棒,爬升時間僅需0.58nS)

Impedance: 10M Ω

(10M歐姆,高阻抗輸入,負載效應最小)

Position Type: DC Accuracy less than 0.5%

(超精密型,DC衰減誤差低於0.5%)



CE

Pintek Electronics Co., Ltd

www.pintek.com.tw


CP-3601R

600MHz Oscilloscope Probe

SPECIFICATIONS:

Bandwidth	DC~600MHz
Readout Function	yes
Rise Time	0.58 ns
Attenuation Ratio	10:1 ($\pm 0.5\%$ at DC)
Input Impedance	10M Ω When used with oscilloscope which have 1 M Ω input
Input Capacitor	Approx. 12 PF
Compensation Range	6PF~22PF
Max. Input Voltage	600V CAT I, 300V CAT II(DC+AC peak) derating with frequency
Operating Temperature	0°C ~ 50 °C
Humidity	85% RH or less(at 35°C)
Safety	Meets EN61010-031 CAT II
Cable Length	1.2 Meter

ACCESSORIES:

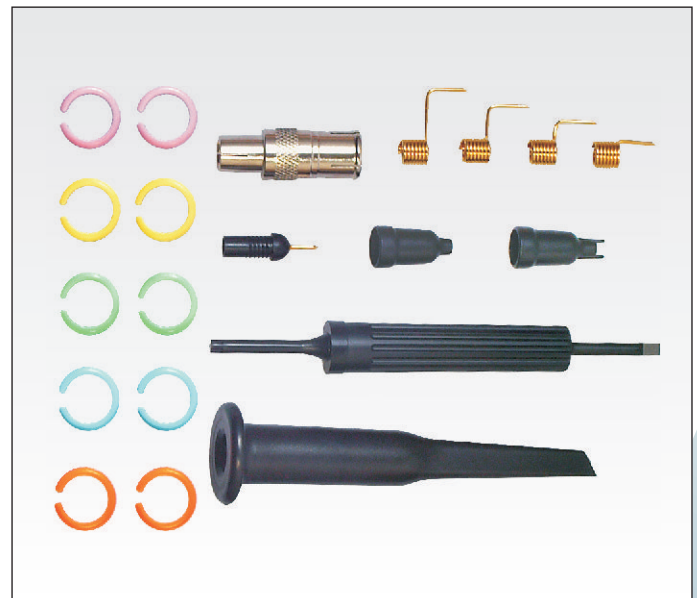

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin City, Taipei Hsien, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT