

电子内卡规

- 适用于测量内孔、内孔槽及其它不易测量的内尺寸。
- 表盘可旋转±170°，方便数值的读取。
- 通电后，显示值即为绝对测量的起始值。
- 有数字显示和模拟表显示，模拟显示的分辨率可自动切换。
- 模拟显示范围：±20格。




506-11-012

开关键	√
绝对、相对测量模式转换键	√
公制、英制测量模式转换键	√
显示数据输出键	√
绝对测量初始值设置键	√
记忆最大值、最小值或保持显示	√
设置公差	√
电池型号	CR2032
自动断电	√
数据输出口	√
接口电缆（选配）	P1104

行程 10mm

货号	测量范围	精度	数字分辨率	模拟分辨率	测量面形式
506-11-012	5-15mm	0.02mm	0.005mm		A型测量面
506-12-012	10-20mm	0.02mm	0.005mm	0.01;	
506-13-012	20-30mm	0.02mm	0.005mm	0.02;	
506-14-012	30-40mm	0.02mm	0.005mm	0.05mm	
506-15-012	40-50mm	0.02mm	0.005mm		
506-12-112	10-20mm	0.02mm	0.005mm	0.01;	B型测量面
506-13-112	20-30mm	0.02mm	0.005mm	0.02;	
506-14-112	30-40mm	0.02mm	0.005mm	0.05mm	
506-15-112	40-50mm	0.02mm	0.005mm		


测量面形式

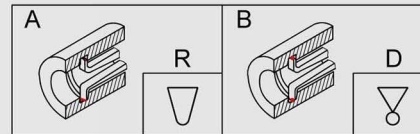

行程 20mm

货号	测量范围	精度	数字分辨率	模拟分辨率	测量面形式
506-22-012	5-25mm	0.03mm	0.005mm		A型测量面
506-23-012	10-30mm	0.03mm	0.005mm	0.01;	
506-24-012	20-40mm	0.03mm	0.005mm	0.02;	
506-25-012	30-50mm	0.03mm	0.005mm	0.05mm	
506-26-012	40-60mm	0.03mm	0.005mm		
506-23-112	10-30mm	0.03mm	0.005mm	0.01;	B型测量面
506-24-112	20-40mm	0.03mm	0.005mm	0.02;	
506-25-112	30-50mm	0.03mm	0.005mm	0.05mm	
506-26-112	40-60mm	0.03mm	0.005mm		

测量内孔直径

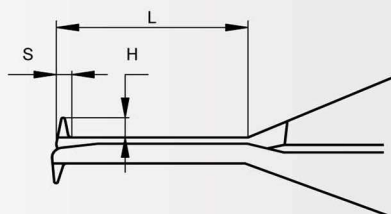

测量范围	L	S	H	测头	
				A (R)	B (D)
行程 10mm					
5-15mm	20mm	1.0mm	1.5mm	0.3mm	/
10-20mm	25mm	1.5mm	3.0mm	0.3mm	Φ 1.5mm
20-30mm	30mm	2.0mm	6.5mm	0.5mm	Φ 1.5mm
30-40mm	30mm	2.5mm	9.0mm	0.5mm	Φ 1.5mm
40-50mm	30mm	2.5mm	9.0mm	0.5mm	Φ 1.5mm
行程 20mm					
5-25mm	35mm	1mm	1.5mm	0.3mm	/
10-30mm	55mm	2mm	3.5mm	0.5mm	Φ 1.5mm
20-40mm	80mm	3mm	6.5mm	0.5mm	Φ 1.5mm
30-50mm	80mm	3mm	8.5mm	0.5mm	Φ 1.5mm
40-60mm	80mm	3mm	8.5mm	0.5mm	Φ 1.5mm