

GOTECH "the best partner" to raise your competition

GT-7072

皮革龜裂試驗器 (皮革抗破器)


LEATHER-CRACKING TESTER

本儀器在檢驗鞋面革及各種薄物革，皮面之抗龜裂指數。先以本器夾框固定試件外周，再以每分鐘大約12mm之速度，使鋼球自皮革內面向上頂起，當皮面產生裂痕時，所上升之高度值，即為龜裂測定值。

It's used for testing the cracks index of various vamps and thin leathers. Grip the outer rim of the specimen then jack it upward from inner side with a steel ball in 12mm/min speed till the surface of specimen appears cracks. The rising height of above action is so-called cracking vale.

鋼球直徑 Diameter of steel ball	Ø6.25mm
試片直徑 Dia. of Specimen	Ø48mm
試片固定後直徑 Specimen Dia. After Grip	Ø25mm
刻度範圍 Reading range	0.05~25mm
體積 Dimension (W×D×H)	Ø7cm,高17cm (H)
重量 Weight (approx.)	1.3kg

■ 切試片機另購 Cutter press for extra charge.

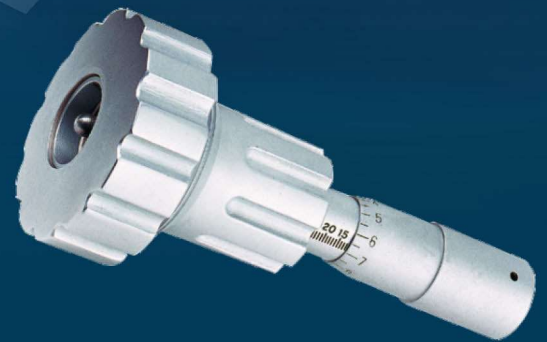

瞭解更多產品信息，請登錄我司網站 www.gotech.biz