


SPD, CAPACITORS AND MORE

Component Testing



 This document has been
optimized for electronic media



Accredited Calibration

Quality at EMC PARTNER is based on an ISO 9001 management system. This is the foundation for an ISO 17025 accreditation verified by the Swiss Calibration Service (SCS). SCS No. 146 is the accreditation number of EMC PARTNER AG. Locally accredited but recognized worldwide through affiliation with the ILAC organisation



COMPONENT TEST SYSTEMS

MANY REQUIREMENTS ONE SUPPLIER

To maintain the quality of lightning and surge protection components used in the power industry, production and batch testing is applied. This requires specialist test equipment with high reliability and reproducible test impulses.

EMC PARTNER have an extensive range of impulse test equipment for:

- › Surge Protection Devices (SPD)
- › Varistors (MOV)
- › Gas Discharge Tubes (GDT)
- › Capacitors
- › Resistors
- › Measuring relays
- › Circuit breakers

Expert instrumentation that provides product specific solutions.

MANY APPLICATIONS ONLY ONE CHOICE

EMC PARTNER component testers are designed with the user in mind. Based on a tried and tested design concept, test instrumentation tailored to specific applications.

SURGE PROTECTION DEVICES



- › Clamping voltage testers
- › Surge withstand pulses
- › Energy absorption
- › Combination Wave tests
- › Duty cycle testing

X-Y CAPACITORS



- › Impulse voltage tests
- › Active flammability tests

CIRCUIT BREAKERS



- › Insulation against an Impulse
- › Unwanted tripping
- › Current Surge Test

MEASURING RELAY TESTERS



- › Combination Wave tests
- › Lightning Surge tests

A WORLDWIDE STANDARD

International Electrotechnical Committee (IEC) / CENELEC (EN)

Surge Protection Devices

IEC 61643-11: Low-voltage surge protective devices - Part 11: Surge protective devices connected to low-voltage power systems - Requirements and test methods.

IEC 61643-12: Low-voltage surge protective devices - Part 12: Surge protective devices connected to low-voltage power distribution systems - Selection and application principles.

IEC 61051-1: Varistors for use in electronic equipment - Part 1: Generic specification

IEC 61051-21: Varistors for use in electronic equipment - Part 2: Blank detail specification for zinc oxide surge suppression varistors.

IEC 60099-4: Surge arresters - Part 4: Metal-oxide surge arresters without gaps for a.c. systems.

Circuit Breakers

IEC 61009-1: Residual current operated circuit breakers with integral overcurrent protection for household and similar uses (RCBOs)

IEC 61008-1: Residual current operated circuit breakers without integral overcurrent protection for household and similar uses (RCCBs)

IEC 61543-1: Residual current-operated protective devices (RCDs) for household and similar use - Electromagnetic compatibility

IEC 60947-1: Low-voltage switchgear and control gear - Part 2: Circuit-breakers

IEC 62271-1: High-voltage switchgear and control gear - Part 1: Common specifications for alternating current switchgear and control gear.

Measuring relays

IEC 60255-26: Measuring relays and protection equipment - Part 26: Electromagnetic compatibility requirements

Capacitors

IEC 60384-14 Ed 4.0: Fixed capacitors for use in electronic equipment - Part 14: Sectional specification - Fixed capacitors for electromagnetic interference suppression and connection to the supply mains

International Telecommunications Union (ITU)

The same standards are applicable as for IEC (see above).

ITU-T K.12: Characteristics of gas discharge tubes for the protection of telecommunications installations

ITU-T K.44: Resistibility tests for telecommunication equipment exposed to overvoltages and overcurrents – Basic Recommendation


Underwriters Laboratories (UL)

Surge Protection Devices

UL 1449: Standard for Safety. Surge Protective Devices

Capacitors

UL 60384-14: Safety Requirements for Fixed Capacitors for Use in Electronic Equipment - Part 14: Sectional Specification: Fixed Capacitors for Electromagnetic Interference Suppression and Connection to the Supply Mains

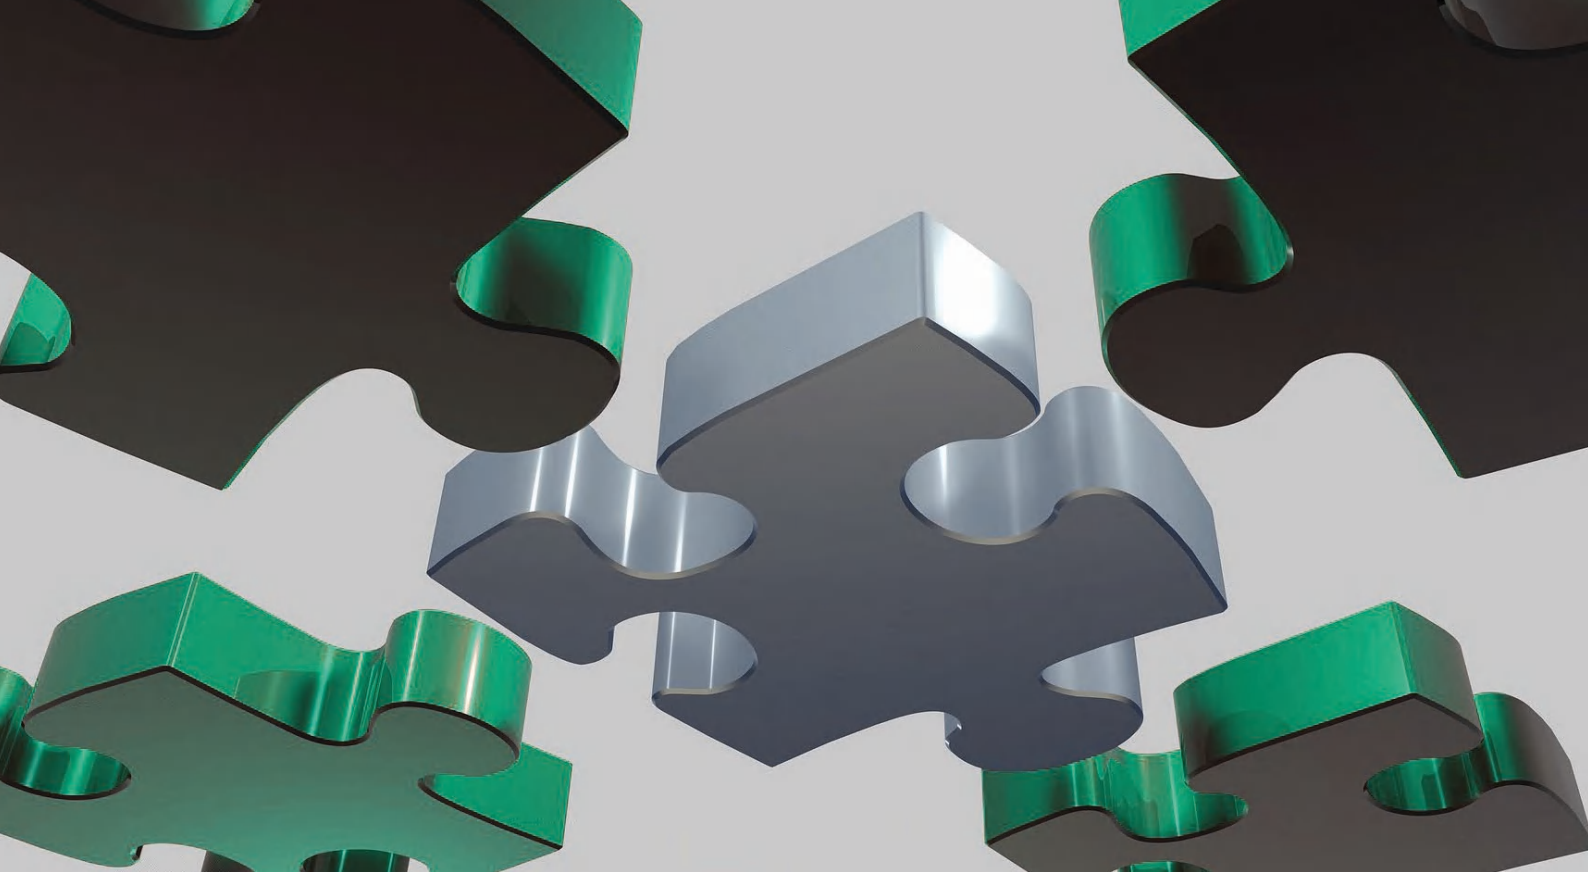

UNIQUE FEATURES

Robust test equipment that gets the job done.

Largest current range



Solid state technology spanning a few Amps up to 100kA. Impulses including 8/20us, 10/350us, 10/1000us and many more.

Impulse wave shapes



Tailored to meet a wide range of applications. Lightning voltage impulses through mains switching surges.

Reliable and reproducible



20 years experience guarantees high reliability. Identical pulses from start to finish.

Accurate measurements



Reaction to an impulse measured in the generator. User programmable to determine Pass or Fail.



TEMA3000 SOFTWARE SUITE


The best solution for professional EMC Test Labs enables comfortable test setups, easy parameter changes and customizable test reports and DSO integration.

Customizable test reports



- › Customize & edit protocols
- › Export to multiple file formats
- › Integrate DSO measurements

Manage tests and sequences

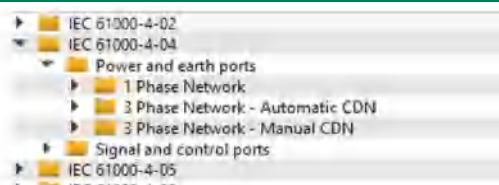

- › Predefined test setups
- › Save and load tests and sequences

Productive workflow



- › Minimal learning time
- › Integrated assistant function

Smart connectivity



- › Transfer tests / reports to PC
- › Remote control from computer

Technical Specifications

CAPACITOR TESTING

CAP-0804

CAP-0804-EXT

MIG0603CAP

MIG1212CAP

MIG-EUT-SET

TC-ST-F + WARNING LAMP

MIG-CAP DUT-MUX

CN-MIG-SMD CAP

CAL-LOAD10nF

CAL-LOAD100nF

TC-ST + WARNING LAMP

SPD (SURGE PROTECTION DEVICE) TESTING

MIG0603CLV1

MIG0603CLV2

CN-MIG-SMD CLV

MIG0606

MIG0612

MIG0624

MIG0624LP1

MIG1206SPD

MIG2412SPD

MIG1248

MIG1260

MIG12100

CDN 50kA-1P-1P

NW40-350

CTS-10350

CTS-101000-500

CTS-101000-750

CTS-101000-1000

TC-ST + WARNING LAMP

CIRCUIT BREAKER TESTING

MIG0603CB

TC-ST + WARNING LAMP

GENERAL ACCESSORIES

TC-ST

WARNING LAMP

EMERGENCY-STOP

PROTECTION RELAY TESTING

See Generators

- › IMU-MGx, DOW-CG1 in “Conducted Immunity Testing”
- › MIG1203STEP in “Insulation Testing”

CAPACITOR TEST SYSTEMS

CAP-0804

CAP-0804 ACTIVE FLAMMABILITY CIRCUIT for $C_{EUT} \leq 1 \mu\text{F}$

Standard	IEC60384-14, UL 60384-14 latest active flammability test
Impulse capacitance	3 $\mu\text{F} \pm 5\%$ (suitable for EUTs up to 1 μF)
Energy at max. voltage	96 joules
Circuit diagram	as in IEC60384-14 figure 8
Adjustable charge voltage	0.25 kV – 8 kV $\pm 10\%$
Guaranteed output voltage	5 kV at EUT terminals for EUTs up to 1 μF 4 kV at EUT terminals for EUTs 1 -50 μF
Pulse repetition rate	1 / 1 s @ 0.25 kV, 1 / 5 s @ 8 kV
Output impedance	selectable: 5 Ω , 10 Ω , 40 Ω , 100 Ω
Voltage waveform	amplitude as in IEC60384-14 figure 9



CAP-0804-EXT CIRCUIT for $1 \mu\text{F} < C_{EUT} \leq 50 \mu\text{F}$ (optional)

Application	extends CAP-0804 for EUTs with higher C
Extension controlled by	CAP-0804
Standard	IEC60384-14, UL 60384-14 latest active flammability test
Impulse capacitance	10 – 150 $\mu\text{F} \pm 5\%$
Suitable for EUTs	1 $\mu\text{F} < C_{EUT} \leq 50 \mu\text{F}$
Energy at max. voltage	4800 joules
Circuit diagram	as in IEC60384-14 figure 8
Adjustable charge voltage	0.25 kV – 7 kV $\pm 10\%$
Guaranteed output voltage	4 kV at EUT terminals for EUTs up to 50 μF
Pulse repetition rate	1 / 2 s @ 2.4 kV, 1 / 5 s @ 6 kV (full compliant)
Output impedance	5 Ω for CEUT > 1 μF
Voltage waveform	amplitude as in IEC60384-14 figure 9
Requires	CAP-0804



CAP-0804 EUT supply manual variac

Power input	L-N 230 V / 64 A for 230V mains L1-L2 / 64 A for 115 V mains
Voltage output (to EUT)	50 – 800 V, adjustable, 1V step
Maximum output current	16 A, see manual for voltage characteristic
Voltage control	(manually) adjustable variac
Voltage display	digital voltmeter, $\pm 3\%$ accuracy
Protection fuse	63 A, slow blow

[Capacitor](#) | [SPD](#) | [Circuit Breaker](#) | [Protection Relay](#)

CAP-0804 control features

Operating system	EPOS proprietary firmware
Languages	8 menu languages, selectable
User interface	7" capacitive touch display
Connectivity	gigabit ethernet, USB, RS485
Synchronization on signals	40 – 800 Hz
Synchronization source	external, 50 – 280 V
Synchronization angle	0 – 359° ± 5°, 1° step
Impulse polarity	positive, negative, electronic switching
Automatic ramp	test level
Trigger out	BNC, max. 6 V
EUT supply voltage waveform	monitoring BNC output connector max. 15 V
EUT supply current waveform	monitoring BNC output connector max. 15 V
Surge monitoring	peak voltage and current on screen, waveform available at BNC outputs
Surge voltage waveform	monitoring BNC output connector max. 15 V
Surge current waveform	monitoring BNC output connector max. 15 V
Programmable connectors	2 BNC connectors (inputs/outputs) as follows
Programmable input functions	Trigger input, Start Test, Stop Test, EUT Fail, EUT Mark, Emergency Stop
Programmable input max. voltage	low range: 0 – 1.5 V, high range: 2.3 – 24 V
Programmable output functions	Running State, Safety Circuit State
Programmable output max. U, I	max. 24 V, max. 300 mA
Safety features (standard)	Emergency stop button on front panel red/yellow as per IEC 60947-5-5, IEC 60204-1, ISO 13850 Safety circuit

CAP-0804 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	
CAP-0804	ON < 300 VA, standby < 10 VA
CAP-0804+EXT	ON < 1800 VA

Weight CAP-0804	287 kg
W x D x H	60 x 72 x 127 cm
Version	19" rack (with wheels), 18 UH

Weight EXT-COMP	192 kg
W x D x H	60 x 65 x 123 cm
Version	19" rack (with wheels), 18 UH

Temperature range	5 – 35 °C
Humidity	25 – 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
Supply connection	3 cables x 2 m, banana plugs
User manual	with conformity declaration
Calibration certificate	factory calibration

CAP-0804 optional accessories

CAP-0804-EXT	extends capability for testing up to 50 µF EUTs
MIG-EUT-SET	programmable switch matrix for up to 8 EUTs for EUTs up to maximum 1 µF
Test cabinet & lamp	TC-ST-F , WARNING-LAMP
Software	TEMA3000: sequence, report, for Windows10

MIG0603CAP

MIG0603CAP circuit: tank capacitor $C_T = 250 \text{ nF}$

Standards (impulse test)	IEC60384-14, UL 60384-14, EN132400 up to 6 kV
Impulse capacitance	0.25 $\mu\text{F} \pm 10 \%$
Energy at max. voltage	4.5 joules
Serial resistor	selectable, 27, 45, 62 $\Omega \pm 10 \%$
Adjustable voltage OC	0.25 kV - 6 kV $\pm 10 \%$
Calibrated level	0.5 kV - 6 kV
Voltage waveform	in 10 nF: 1.7 $\mu\text{s} +50\%/-0\%$, 46 $\mu\text{s} +50\%/-0\%$ in 100 nF: 1.6 $\mu\text{s} +50\%/-0\%$, 47 $\mu\text{s} +50\%/-0\%$
EUT range (wf in tolerance)	0 - 27 nF
Undershoot	< 5 %
Pulse repetition	up to 1 / 15 s
Polarity	positive, negative, alternating
Programmable ramps	voltage



MIG0603CAP circuit: tank capacitor $C_T = 20 \mu\text{F}$

Standards (impulse test)	IEC60384-14, UL 60384-14, EN132400 up to 6 kV
Impulse capacitance	20 $\mu\text{F} \pm 10 \%$
Energy at max. voltage	360 joules
Serial resistor	selectable, 3, 5, 7, 9, 13, 25 $\Omega \pm 10 \%$
Adjustable voltage OC	0.25 kV - 6 kV $\pm 10 \%$ for EUT up to 120 nF 0.25 kV - 5.7 kV $\pm 10 \%$ for EUT up to 180 nF 0.25 kV - 5.4 kV $\pm 10 \%$ for EUT up to 10 μF
Calibrated level	0.5 kV - 6 kV
EUT range 1	27 - 120 nF
Voltage waveform	in 10 nF: 1.7 $\mu\text{s} +50\%/-0\%$, 46 $\mu\text{s} +50\%/-0\%$ in 100 nF: 1.6 $\mu\text{s} +50\%/-0\%$, 47 $\mu\text{s} +50\%/-0\%$
Undershoot	< 10 %
EUT range 2	120 nF - 10 μF
Voltage waveform	in 10 nF: 1.7 $\mu\text{s} +50\%/-0\%$, 46 $\mu\text{s} +50\%/-0\%$ in 100 nF: 1.6 $\mu\text{s} +50\%/-0\%$, 47 $\mu\text{s} +50\%/-0\%$
Undershoot	> 10 %
Pulse repetition	up to 1 / 15 s
Polarity	positive, negative, alternating
Programmable ramps	voltage

MIG0603CAP control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Pulse voltage monitor BNC	10 V = 6 kV, accuracy $\pm 3\%$
Pulse current monitor BNC	10 V = 3 kA, accuracy $\pm 3\%$
Pulse voltage on display	0.250 – 6.6 kV, accuracy $\pm 3\%$
Pulse current on display	0.125 – 3.3 kA, accuracy $\pm 3\%$
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0603CAP supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) $\pm 10\%$
Power consumption	ON < 400 VA, standby < 10 VA

Weight	28 kg
W x D x H	45 x 57 x 25 cm
Version	19" unit, 4 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0603CAP optional accessories

EUT fixture for 8 EUTs	MIG-CAP DUT-MUX programmable fixture
Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

MIG1212CAP

MIG1212CAP circuit: tank capacitor $C_T = 250 \text{ nF}$

Standards (impulse test)	IEC60384-14, UL 60384-14, EN132400
Impulse capacitance	0.25 $\mu\text{F} \pm 10 \%$
Energy at max. voltage	18 joules
Serial resistor	selectable, 27, 45, 62 $\Omega \pm 10 \%$
Adjustable voltage OC	0.5 kV - 12 kV $\pm 10 \%$
Calibrated level	1 kV - 12 kV
Voltage waveform	in 10 nF: 1.7 $\mu\text{s} +50\%/-0\%$, 46 $\mu\text{s} +50\%/-0\%$ in 100 nF: 1.6 $\mu\text{s} +50\%/-0\%$, 47 $\mu\text{s} +50\%/-0\%$
EUT range (wf in tolerance)	0 - 27 nF
Undershoot	< 10 %
Pulse repetition	up to 1 / 10 s
Polarity	positive, negative, alternating
Programmable ramps	voltage



MIG1212CAP circuit: tank capacitor $C_T = 20 \mu\text{F}$

Standards (impulse test)	IEC60384-14, UL 60384-14, EN132400
Impulse capacitance	20 $\mu\text{F} \pm 10 \%$
Energy at max. voltage	1440 joules
Serial resistor	selectable, 3, 5, 7, 9, 13, 25 $\Omega \pm 10 \%$
Adjustable voltage OC	0.5 kV - 12 kV $\pm 10 \%$ for EUT up to 120 nF 0.5 kV - 11 kV $\pm 10 \%$ for EUT up to 180 nF 0.5 kV - 10 kV $\pm 10 \%$ for EUT up to 10 μF
Calibrated level	1 kV - 12 kV
EUT range	27 nF - 10 μF
Voltage waveform	in 10 nF: 1.7 $\mu\text{s} +50\%/-0\%$, 46 $\mu\text{s} +50\%/-0\%$ in 100 nF: 1.6 $\mu\text{s} +50\%/-0\%$, 47 $\mu\text{s} +50\%/-0\%$
Undershoot	< 10 %
Pulse repetition	up to 1 / 30 s
Polarity	positive, negative, alternating
Programmable ramps	voltage

MIG1212CAP circuit: induction test CWG, $C_T = 20 \mu\text{F}$

Standards	IEC60384-14, induction test
Impulse capacitance	20 $\mu\text{F} \pm 10 \%$
Energy at max. voltage	1440 joules
Output impedance	4 $\Omega \pm 10 \%$
Adjustable voltage OC	0.5 kV - 12 kV $\pm 10 \%$

Calibrated level	2 kV – 12 kV
Voltage waveform	1.2 μ s \pm 30 % / 50 μ s \pm 20 %
Undershoot	< 5 %
Pulse repetition	up to 1 / 30 s
Polarity	positive, negative, alternating
Programmable ramps	voltage

MIG1212CAP control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Pulse voltage monitor BNC	10 V = 12 kV, accuracy \pm 3%
Pulse current monitor BNC	10 V = 3 kA, accuracy \pm 3%
Pulse voltage on display	0.250 – 12 kV, accuracy \pm 3%
Pulse current on display	0.125 – 3.3 kA, accuracy \pm 3%
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG1212CAP supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) \pm 10%
Power consumption	ON < 400 VA, standby < 10 VA

Weight	57 kg
W x D x H	45 x 60 x 43 cm
Version	19" unit, 8 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration


MIG1212CAP optional accessories

EUT fixture for 8 EUTs	MIG-CAP DUT-MUX programmable fixture
Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

ACCESSORIES TO CAPACITOR TEST SYSTEMS

MIG-EUT-SET

Standard	IEC60384-14 latest
Application	auto-coupling switch matrix for 8 EUTs
Outputs	max. 8 capacitors connected at the same time
EUT dim / volume available	12 x 15 x 28 cm
EUT connection	via MC clips
Active output signalisation	8 LEDs indicating output status
Flammability protection	epoxy plate (reserve plate included in delivery)
Insulation withstand	pulse 1.2/50 μ s up to 6 kV
Weight	8.5 kg
Dimensions	32 x 41 x 31 cm
Included	control cable to generator, EUT clips
Requires	CAP-0804 , TC-ST-F , WARNING LAMP



TC-ST-F

Standard	IEC60384-14 latest
Application	test cabinet for active flammability test
EUT volume	12 x 15 x 28 cm
Warning lamps	red and green (2 lamps), safety circuit
Test cabinet material	acrylic glass
Flammability protection	glass plate and box
Insulation withstand	pulse 1.2/50 μ s up to 36 kV
Weight	11 kg
Dimensions	43.5 x 47 x 25.4 cm
Included	control cable to generator
Requires	CAP-0804



MIG-CAP DUT-MUX


Standard	IEC60384-14 latest
Application	auto-coupling switch matrix for 8 EUTs
Outputs	max. 8 capacitors connected at the same time
EUT dim / volume available	10 x 10 x 30 cm
EUT connection	via MC clips
Voltage measurement	cables to generator, measurement at EUT port
Active output signalisation	8 LEDs indicating output status
Insulation withstand	pulse 1.2/50 μ s up to 12 kV
Weight	8.5 kg
Dimensions	36 x 20 x 10 cm
Included	control cable to generator, EUT clips
Requires	MIG1212CAP , TC-ST + WARNING LAMP



Capacitor | SPD | Circuit Breaker | Protection Relay

CN-MIG-SMD CAP

Application	set of fixtures for SMD capacitors
Test level voltage	max. 6 kV
Test level current	max. 6 kA
CAP adapter sets (additional)	10 PCBs x 20 capacitor mounts, different sizes adapter for 1 mount at a time
Weight	5 kg
Dimensions	32 x 22 x 10 cm
Generators	MIG0603CAP , MIG1212CAP



CAL-LOAD10nF

Standard	IEC60384-14
Application	calibration load for MIG0603CAP , MIG1212CAP
Capacitance	10 nF ± 2%
Expected impulse charact.	rise time tr: 1.7 µs - 0 % / + 50 % duration td: 46 µs - 0 % / + 50 %
Max. voltage 1.2/50 µs	12 kV
Weight	1.2 kg
Dimensions	24 x 8 x 8 cm



CAL-LOAD100nF

Standard	IEC60384-14
Application	calibration load for MIG0603CAP , MIG1212CAP
Capacitance	100 nF ± 2%
Expected impulse charact.	rise time tr: 1.6 µs - 0 % / + 50 % duration td: 47 µs - 0 % / + 50 %
Max. voltage 1.2/50 µs	12 kV
Weight	1.2 kg
Dimensions	24 x 8 x 8 cm



SPD TESTING

MIG0603CLV1



MIG0603CLV1 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11, CCITT K12 surge
Application	test of varistors VDR types 05Dx, 20Dx
Impulse capacitance	10 μ F \pm 10 %
Energy at max. voltage	180 joules
Output impedance	10 Ω , 100 Ω , 1000 Ω \pm 10 %
Selectable voltage VCL	up to 3300 V in different ranges
Voltage waveform	not defined
Selectable current range Ip	0.2 A – 300 A in different ranges
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Pulse repetition	highest repetition rate 1 pulse / 8 s
Polarity	positive, negative, alternating

MIG0603CLV1 impedance ranges

MIG0603CLV1	Varistor characteristics			
ZOUT	Ip	min rd@VCL	max rd@VCL	max VCL
Ω	A	Ω	Ω	V
1000	1	10	100	500
1000	2.5	10	100	500
100	5	10	100	1300
100	10	5	50	1500
100	25	5	50	2000
10	50	3	30	3000
10	100	1	10	3000
10	200	1	10	1800

MIG0603CLV1 measuring ranges

Selection	ZOUT	VCL max	Ipk	Range
	Ω	V	A	
<1000V;<2.5A	1000	1000	1A; 2.5A	10V=5A; 10V=1000V
<300V;<2.5A	1000	300	1A; 2.5A	10V=5A; 10V=300V
<100V;<2.5A	1000	100	1A; 2.5A	10V=5A; 10V=100V
<3000V;<25A	100	3000	5A; 10 A; 20A; 25 A	10V=25A; 10V=3000V
<1000V;<25A	100	1000	5A; 10 A; 20A; 25 A	10V=25A; 10V=1000V
<300V;<25A	100	300	5A; 10 A; 20A; 25 A	10V=25A; 10V=300V
<100V;<25A	100	100	5A; 10 A; 20A; 25 A	10V=25A; 10V=100V
<3000V;<200A	10	3000	50A; 100A; 200A	10V=200A;10V=3000V
<1000V;<200A	10	1000	50A; 100A; 200A	10V=200A;10V=1000V
<300V;<200A	10	300	50A; 100A; 200A	10V=200A; 10V=300V
<100V;<200A	10	100	50A; 100A; 200A	10V=200A; 10V=100V

MIG0603CLV1 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	see table measuring ranges, accuracy $\pm 5\%$
Surge current monitor BNC	see table measuring ranges, accuracy $\pm 5\%$
Surge voltage on display	see table measuring ranges, accuracy $\pm 5\%$
Surge current on display	see table measuring ranges, accuracy $\pm 5\%$
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0603CLV1 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) $\pm 10\%$
Power consumption	ON < 400 VA, standby < 10 VA
Weight	22 kg
W x D x H	45 x 57 x 19 cm
Version	19" unit, 4 UH
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing

Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0603CLV1 optional accessories

Test cabinet	TC-ST + WARNING LAMP
EUT fixture	CN-MIG-SMD-CLV
Software	TEMA: sequence, report, for latest Windows

MIG0603CLV2



MIG0603CLV2 circuit: 8/20 μs current

Standards	IEC60060-1, IEC61643-11, CCITT K12 surge
Application	test of varistors VDR types 05Dx, 20Dx
Impulse capacitance	9 μF ± 10 %
Energy at max. voltage	180 joules
Output impedance	5, 10 Ω, 100 Ω, 1000 Ω ± 10 %
Voltage VCL	up to 3000 V in different ranges
Voltage waveform	not defined
Selectable current range Ip	0.2 A – 600 A in different ranges
Current waveform	8 μs ± 20 % / 20 μs ± 20 %
Pulse repetition	highest repetition rate 1 pulse / 8 s
Polarity	positive, negative, alternating

MIG0603CLV2 impedance ranges

MIG0603CLV2	Varistor characteristics				
	ZOUT	Ip	min rd@VCL	max rd@VCL	max VCL
	Ω	A	Ω	Ω	V
	1000	1	10	100	500
	1000	2.5	10	100	500
	100	5	10	100	1300
	100	10	5	50	1500
	100	25	5	50	2000
	10	50	3	30	3000
	10	100	1	10	3000
	10	200	1	10	1800
	5	250	0.2	2	2500
	5	500	0.2	2	1500

MIG0603CLV2 measuring ranges

Selection	ZOUT	VCL max	Ipk	Range
	Ω	V	A	
<1000V;<2.5A	1000	1000	1A; 2.5A	10V=5A; 10V=1000V
<300V;<2.5A	1000	300	1A; 2.5A	10V=5A; 10V=300V
<100V;<2.5A	1000	100	1A; 2.5A	10V=5A; 10V=100V
<3000V;<25A	100	3000	5A; 10 A; 20A; 25 A	10V=25A; 10V=3000V
<1000V;<25A	100	1000	5A; 10 A; 20A; 25 A	10V=25A; 10V=1000V
<300V;<25A	100	300	5A; 10 A; 20A; 25 A	10V=25A; 10V=300V
<100V;<25A	100	100	5A; 10 A; 20A; 25 A	10V=25A; 10V=100V
<3000V;<200A	10	3000	50A; 100A; 200A	10V=200A;10V=3000V
<1000V;<200A	10	1000	50A; 100A; 200A	10V=200A;10V=1000V
<300V;<200A	10	300	50A; 100A; 200A	10V=200A; 10V=300V
<100V;<200A	10	100	50A; 100A; 200A	10V=200A; 10V=100V
<3000V;<500A	5	3000	250A; 500A	10V=1000A;10V=3000V
<1000V;<500A	5	1000	250A; 500A	10V=1000A;10V=1000V
<300V;<500A	5	300	250A; 500A	10V=1000A; 10V=300V
<100V;<500A	5	100	250A; 500A	10V=1000A; 10V=100V

MIG0603CLV2 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	see table measuring ranges, accuracy ± 5 %
Surge current monitor BNC	see table measuring ranges, accuracy ± 5 %
Surge voltage on display	see table measuring ranges, accuracy ± 5 %
Surge current on display	see table measuring ranges, accuracy ± 5 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0603CLV2 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA
Weight	23 kg
W x D x H	45 x 57 x 19 cm
Version	19" unit, 4 UH
Temperature range	0 – 35 °C
Humidity	25 – 80 % non-condensing
Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0603CLV2 optional accessories

Test cabinet	TC-ST + WARNING LAMP
EUT fixture	CN-MIG-SMD-CLV
Software	TEMA: sequence, report, for latest Windows

CN-MIG-SMD CLV

Application	set of fixtures for SMD varistors
Test level voltage	max. 6 kV
Test level current	max. 6 kA
Delivery	25 PCBs x 20 varistor mounts (different sizes) adapter for 1 mount at a time, to MIG0603CLVx
Weight	5 kg
Dimensions	32 x 22 x 10 cm

MIG0606

MIG0606 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11, IEC61009-1
Application	test of protection devices for voltage < 1000 V
Impulse capacitance	20 μ F \pm 10 %
Energy at max. voltage	375 joules
Output impedance	1 Ω \pm 10 %
Voltage waveform	not defined
Adjustable current range	250 A – 6 kA
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	highest repetition rate 1 pulse / 15 s
Polarity	positive, negative, alternating



MIG0606 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 6 kV, accuracy \pm 3 %
Surge current monitor BNC	10 V = 6 kA, accuracy \pm 3 %
Surge voltage on display	250 V – 6.6 kV, accuracy \pm 3 %
Surge current on display	250 A – 6.6 kA, accuracy \pm 3 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0606 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA

Weight	24 kg
W x D x H	45 x 57 x 25 cm
Version	19" unit, 4 UH

Temperature range	0 – 35 °C
Humidity	25 – 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0606 optional accessories

Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

MIG0612

MIG0612 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of protection devices for voltage < 1000 V
Impulse capacitance	2 x 20 μ F \pm 10 %
Energy at max. voltage	750 joules
Output impedance	0.5 Ω \pm 10 %
Voltage waveform	not defined
Adjustable current range	250 A – 12 kA (250 A – 6 kA or 500 A – 12 kA)
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	highest repetition rate 1 pulse / 30 s
Polarity	positive, negative, alternating



MIG0612 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 6 kV, accuracy \pm 3 %
Surge current monitor BNC	10 V = 12 kA, accuracy \pm 3 %
Surge voltage on display	250 V – 6.6 kV, accuracy \pm 3 %
Surge current on display	250 A – 12.5 kA, accuracy \pm 3 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0612 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA

Weight	36 kg
W x D x H	45 x 57 x 25 cm
Version	19" unit, 4 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0612 optional accessories

Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

MIG0624

MIG0624 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of protection devices for voltage < 1000 V
Impulse capacitance	4 x 20 μ F \pm 10 %
Energy at max. voltage	1500 joules
Output impedance	0.25 Ω \pm 10 %
Voltage waveform	not defined
Adjustable current range	250 A – 6 kA, impedance 1 Ω \pm 10 %, or 500 A – 12 kA, impedance 0.5 Ω \pm 10 %, or 1 kA – 18 kA, impedance 0.33 Ω \pm 10 %, or 2 kA – 24 kA, impedance 0.25 Ω \pm 10 %
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	highest repetition rate 1 pulse / 30 s
Polarity	positive, negative, alternating

MIG0624 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 6 kV, accuracy \pm 3 %
Surge current monitor BNC	10 V = 24 kA, accuracy \pm 3 %
Surge voltage on display	250 V – 6.6 kV, accuracy \pm 3 %
Surge current on display	250 A – 25 kA, accuracy \pm 3 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0624 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA
Weight	57 kg
W x D x H	45 x 57 x 43 cm
Version	19" unit, 8 UH
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0624 optional accessories

Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

MIG0624LP1

MIG0624LP1 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of varistors (VDR), surge arresters
Impulse capacitance	4 x 20 μ F \pm 10 %
Energy at max. voltage	1500 joules
Output impedance	0.25 Ω \pm 10 %
Voltage waveform	not defined
Adjustable current range	250 A – 6 kA, impedance 1 Ω \pm 10 %, or 500 A – 12 kA, impedance 0.5 Ω \pm 10 %, or 1 kA – 18 kA, impedance 0.33 Ω \pm 10 %, or 2 kA – 24 kA, impedance 0.25 Ω \pm 10 %
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	highest repetition rate 1 pulse / 30 s
Polarity	positive, negative, alternating



MIG0624LP1 circuit: 10/1000 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of varistors (VDR), surge arresters
Impulse capacitance	8 x 10 μ F \pm 10 %
Energy at max. voltage	1500 joules
Output impedance	25 Ω \pm 10 %
Voltage waveform	not defined
Adjustable current range	5 A – 60 A, impedance 100 Ω \pm 10 %, or 10 A – 120 A, impedance 50 Ω \pm 10 %, or 15 A – 180 A, impedance 33 Ω \pm 10 %, or 20 A – 240 A, impedance 25 Ω \pm 10 %
Current waveform	10 μ s \pm 20 % / 1000 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	highest repetition rate 1 pulse / 30 s
Polarity	positive, negative, alternating

MIG0624LP1 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 6 kV, accuracy $\pm 3\%$
Surge current monitor BNC	10 V = 24 kA, accuracy $\pm 3\%$, for 8/20 μs 10 V = 80, 160, 240, 320 A, for 10/1000 μs
Surge voltage on display	250 V – 6.6 kV, accuracy $\pm 3\%$
Surge current on display	250 A – 25 kA, accuracy $\pm 3\%$, for 8/20 μs 6 A – 320 A, accuracy $\pm 3\%$, for 10/1000 μs
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0624LP1 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) $\pm 10\%$
Power consumption	ON < 400 VA, standby < 10 VA
Weight	57 kg
W x D x H	45 x 57 x 43 cm
Version	19" unit, 8 UH
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0624LP1 optional accessories

Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

MIG1206SPD

MIG1206SPD: IEC61643-1 standard paragraphs covered

7.1.2 Class I and II	nominal discharge current test
7.1.3 Class I and II	voltage impulse test
7.1.4 Class III	surge combination wave test
7.5.1	determination of a switching (crowbar) in SPD
7.5.2	measur. of residual voltage with 8/20 pulses
7.5.3	measur. of spark-over impulse voltage
7.5.4	measur. of limiting voltage with CWG

Not covered

7.5.5	alternate test to CWG test
7.6	operating duty tests

MIG1206SPD circuit: CWG / Surge 2 Ω, coupling 18 μF, 12 kV

Standards	IEC61643-11, VDE0675-6
Application	test IEC class III (VDE class D) SPDs
Impulse capacitance	10 μF ± 10 %
Energy at max. voltage	720 joules
Output impedance	2 Ω ± 10 %
Adjustable voltage OC	1 kV – 13.2 kV ± 10 %
Calibrated level	1 kV – 12 kV
Voltage waveform	1.2 μs ± 30 % / 50 μs ± 20 %
Calibrated current SC	0.5 kA – 6 kA ± 10 %
Current waveform	8 μs ± 20 % / 20 μs ± 20 %
Undershoot	< 30 %
Pulse repetition	up to 1 / 5 s @ 1 kV, 1 / 30 s @ 12 kV
Polarity	positive, negative, alternating
Synchronization	0 – 360°, step 1°
Programmable ramps	voltage, synchronisation angle

MIG1206SPD built-in manual CDN

Test level surge	12 kV
EUT power input	AC 250 V L-N, 50, 60 Hz, 16 A
EUT power input	max. 260 V ac between “low” and earth
EUT overcurrent protection	CDN input fuse 16 A, super slow
Coupling L-N	2 Ω, 18 μF
Coupling L-PE, N-PE	12 Ω, 9 μF
Decoupling	as in IEC61000-4-5



MIG1206SPD circuit: voltage impulse 1.2/50 μ s, 42 Ω , 12 kV

Standards	IEC61643-11, VDE0675-6
Application	test SPDs IEC class I and II (VDE class A,C)
Impulse capacitance	10 μ F \pm 10 %
Energy at max. voltage	720 joules
Output impedance	40 + 2 Ω \pm 10 %
Adjustable voltage OC	1 kV – 13.2 kV \pm 10 %
Calibrated level	1 kV – 12 kV
Voltage waveform	1.2 μ s \pm 30 % / 50 μ s \pm 20 %
Current waveform	not defined
Pulse repetition	up to 1 / 5 s @ 1 kV, 1 / 30 s @ 12 kV
Polarity	positive, negative, alternating
Synchronization	0 – 360°, step 1°
Programmable ramps	voltage, synchronisation angle

MIG1206SPD circuit: current impulse 8/20 μ s, < 2 Ω , 6 kA

Standards	IEC61643-11, VDE0675-6
Application	test SPDs IEC class I and II (VDE class A,C)
Impulse capacitance	10 μ F \pm 10 %
Energy at max. voltage	720 joules
Output impedance	< 2 Ω
Voltage waveform	not defined
Adjustable current range	250 A – 6.3 kA
Calibrated level	500 A – 6 kA
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	up to 1 / 5 s @ 1 kA, 1 / 30 s @ 6 kA
Polarity	positive, negative, alternating

MIG1206SPD control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 12 kV, accuracy \pm 3%
Surge current monitor BNC	10 V = 6 kA, accuracy \pm 3%
Surge voltage on display	0.5 – 13.2 kV, accuracy \pm 3%
Surge current on display	0.25 – 6.6 kA, accuracy \pm 3%
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Synchro. source	EUT power, direct out
Power synchro. on/off	0 – 360°, 1° step
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

[Capacitor](#) | [SPD](#) | [Circuit Breaker](#) | [Protection Relay](#)

MIG1206SPD supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA
Weight	66 kg
W x D x H	45 x 57 x 43 cm
Version	19" unit, 8 UH
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG1206SPD optional accessories

Test cabinet	TC-ST + WARNING LAMP
Test cables	CN-MIG4803, 1.2 m length (specs on request)
Software	TEMA: sequence, report, for latest Windows

MIG2412SPD

MIG2412SPD: IEC61643-11 standard paragraphs covered

7.1.2 Class I and II	nominal discharge current test
7.1.3 Class I and II	voltage impulse test
7.1.4 Class III	surge combination wave test
7.5.1	determination of a switching (crowbar) in SPD
7.5.2	measur. of residual voltage with 8/20 pulses
7.5.3	measur. of spark-over impulse voltage
7.5.4	measur. of limiting voltage with CWG

Not covered

7.5.5	alternate test to CWG test
7.6	operating duty tests

MIG2412SPD circuit: CWG / Surge 2 Ω, 24 kV

Standards	IEC61643-11, VDE0675-6, IEC61000-4-5 latest edition, ANSI C62.41
Application	test IEC class III (VDE class D) SPDs
Impulse capacitance 1	10 μF ± 10 %, 200 joules, 6 kV
Impulse capacitance 2	10 μF ± 10 %, 3000 joules, 24 kV
Output impedance	2 Ω ± 10 %
Adjustable voltage OC	200 V – 24.4 kV ± 10 %, in two ranges
Calibrated level	250 V – 24 kV
Voltage waveform	1.2 μs ± 30 % / 50 μs ± 20 %
Calibrated current SC	250 A – 12 kA ± 10 %, in two ranges
Current waveform	8 μs ± 20 % / 20 μs ± 20 %
Undershoot	< 30 %
Pulse repetition	up to 1 / 7 s @ 2 kV, 1 / 30 s @ 24 kV
Polarity	positive, negative, alternating
Synchronization	0 – 360°, step 1°
Programmable ramps	voltage, synchronisation angle

MIG2412SPD built-in manual CDN

Test level surge	24 kV
EUT power input	AC 440 V L-N, 50, 60 Hz, 16 A AC 280 V L-PE, N-PE
EUT overcurrent protection	CDN input fuse 2 x 16 A, super slow
Coupling L-N	2 Ω, 18 μF
Coupling L-PE, N-PE	12 Ω, 9 μF
Decoupling	as in IEC61000-4-5



MIG2412SPD circuit: voltage impulse 1.2/50 μ s, 42 Ω , 24 kV

Standards	IEC61643-11, VDE0675-6
Application	test SPDs IEC class I and II (VDE class A,C)
Impulse capacitance	10 μ F \pm 10 %
Energy at max. voltage	3000 joules
Output impedance	40 + 2 Ω \pm 10 %
Adjustable voltage OC	1 kV – 24.4 kV \pm 10 %
Calibrated level	2 kV – 24 kV
Voltage waveform	1.2 μ s \pm 30 % / 50 μ s \pm 20 %
Current waveform	not defined
Pulse repetition	up to 1 / 9 s @ 1 kV, 1 / 30 s @ 24 kV
Polarity	positive, negative, alternating
Synchronization	0 – 360°, step 1°
Programmable ramps	voltage, synchronisation angle

MIG2412SPD circuit: current impulse 8/20 μ s, 2 Ω , 12 kA

Standards	IEC61643-11, VDE0675-6
Application	test SPDs IEC class I and II (VDE class A,C)
Impulse capacitance	10 μ F \pm 10 %
Energy at max. voltage	3000 joules
Output impedance	2 Ω
Voltage waveform	not defined
Adjustable current range	500 A – 13 kA +10% / -0%
Calibrated level	1 kA – 12 kA
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	up to 1 / 10 s @ 1 kA, 1 / 28 s @ 12 kA
Polarity	positive, negative, alternating

MIG2412SPD control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 24 kV, accuracy \pm 3%
Surge current monitor BNC	10 V = 12 kA, accuracy \pm 3%
Surge voltage on display	0.25 – 26.4 kV, accuracy \pm 3%
Surge current on display	0.25 – 13.2 kA, accuracy \pm 3%
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Synchro. source	EUT power, direct out
Power synchro. on/off	0 – 360°, 1° step
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG2412SPD supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA
Weight	225 kg
W x D x H	60 x 65 x 123 cm
Version	19" rack (with wheels), 18 UH
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG2412SPD optional accessories

Test cabinet	TC-ST + WARNING LAMP
Software	TEMA: sequence, report, for latest Windows

MIG1248

MIG1248 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of SPDs
Impulse capacitance	4 x 20 μ F \pm 10 %
Energy at max. voltage	6000 joules
Voltage waveform	not defined
Adjustable current range	1 kA – 12 kA, impedance 1 Ω \pm 10 %, or 2 kA – 24 kA, impedance 0.5 Ω \pm 10 %, or 3 kA – 36 kA, impedance 0.33 Ω \pm 10 %, or 4 kA – 48 kA, impedance 0.25 Ω \pm 10 %
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	1 pulse / 4 s @ 1 kA, 1 pulse / 30 s @ 48 kA
Polarity	positive, negative, alternating

MIG1248 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 12 kV, accuracy \pm 3 %
Surge current monitor BNC	10 V = 48 kA, accuracy \pm 3 %
Surge voltage on display	250 V – 13.2 kV, accuracy \pm 3 %
Surge current on display	1 kA – 48.7 kA, accuracy \pm 3 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled



MIG1248 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA

Weight	240 kg
W x D x H	60 x 65 x 184 cm
Version	19" rack (with wheels), 36 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Test cabinet	max. EUT dimensions 160 x 300 x 100 mm
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG1248 optional accessories

Software	TEMA: sequence, report, for latest Windows
-----------------	--

MIG1260

MIG1260 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of SPDs
Impulse capacitance	5 x 20 μ F \pm 10 %
Energy at max. voltage	7200 joules
Voltage waveform	not defined
Adjustable current range	1 kA – 12 kA, impedance 1 Ω \pm 10 %, or 2 kA – 24 kA, impedance 0.5 Ω \pm 10 %, or 3 kA – 36 kA, impedance 0.33 Ω \pm 10 %, or 4 kA – 48 kA, impedance 0.25 Ω \pm 10 %, or 5 kA – 60 kA*, impedance 0.2 Ω \pm 10 %
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	1 pulse / 4 s @ 1 kA, 1 pulse / 30 s @ 60 kA
Polarity	positive, negative, alternating

*Isc is guaranteed only in the calibration setup, contact sales for more info



MIG1260 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 12 kV, accuracy \pm 3 %
Surge current monitor BNC	10 V = 60 kA, accuracy \pm 3 %
Surge voltage on display	250 V – 13.2 kV, accuracy \pm 3 %
Surge current on display	1 kA – 60 kA, accuracy \pm 3 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Synchro. source	EUT power (with CDN 50kA-1P)
Power synchro. on/off	peak synchronisation, 0 – 360°, step 1°
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG1260 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA

Rack 1 (generator)

Weight	260 kg
W x D x H	60 x 65 x 184 cm
Version	19" rack (with wheels), 36 UH

Rack 2 (controller)

Weight	120 kg
W x D x H	60 x 65 x 150 cm
Version	19" rack (with wheels), 18 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG1260 optional accessories

Test cabinet	TC-ST + WARNING LAMP
CDN for powered EUTs	CDN50 kA-1P, includes adjust. power source
Extension for 40(10)/350 µs	NW40-350 for 10 kA 40/350 µs current
Software	TEMA: sequence, report, for latest Windows

MIG12100

MIG12100 circuit: 8/20 μ s current

Standards	IEC60060-1, IEC61643-11
Application	test of SPDs
Impulse capacitance	10 x 20 μ F \pm 10 %
Energy at max. voltage	14400 joules
Voltage waveform	not defined
Adjustable current range	1 kA – 12 kA, impedance 1 Ω \pm 10 %, or 2 kA – 24 kA, impedance 0.5 Ω \pm 10 %, or 3 kA – 36 kA, impedance 0.33 Ω \pm 10 %, or 4 kA – 48 kA, impedance 0.25 Ω \pm 10 %, or 5 kA – 60 kA*, impedance 0.2 Ω \pm 10 %, or 48 kA – 100 kA*, impedance 0.1 Ω \pm 10 %
Current waveform	8 μ s \pm 20 % / 20 μ s \pm 20 %
Undershoot	< 20 %
Pulse repetition	1 pulse / 4 s @ 1 kA, 1 pulse / 55 s @ 100 kA
Polarity	positive, negative, alternating

*Isc is guaranteed only in the calibration setup, contact sales for more info



MIG12100 control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 12 kV, accuracy \pm 3 %
Surge current monitor BNC	10 V = 100 kA, accuracy \pm 3 %
Surge voltage on display	250 V – 13.2 kV, accuracy \pm 3 %
Surge current on display	1 kA – 100 kA, accuracy \pm 3 %
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Synchro. source	EUT power (with CDN 50kA-1P)
Power synchro. on/off	peak synchronisation, 0 – 360°, step 1°
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG12100 supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) \pm 10%
Power consumption	ON < 400 VA, standby < 10 VA

Rack 1 (generator)

Weight	260 kg
W x D x H	60 x 65 x 184 cm
Version	19" rack (with wheels), 36 UH

Rack 2 (generator)

Weight	260 kg
W x D x H	60 x 65 x 184 cm
Version	19" rack (with wheels), 36 UH

Rack 3 (controller)

Weight	210 kg
W x D x H	650 x 600 x 1500 mm
Version	19" rack, 18 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG12100 optional accessories

Test cabinet	TC-ST + WARNING LAMP
CDN for powered EUTs	CDN50 kA-1P, includes adjust. Power source
Extension for 40(10)/350 µs	NW40-350 for 20 kA 40/350 µs current
Software	TEMA: sequence, report, for latest Windows

CDN 50kA-1P

Application	CDN for powered EUTs
Test level 8/20 μs current	max. 5 x 10 kA
Adjustable power source	included, manual setting, voltage display
Power source ranges	0 – 230 V, 5 A 0 – 800 V, 5 A 0 – 1200 V, 3 A
Decoupling to power line	AC 2 x 1200 V
Decoupling to generator	max. 2 x 2 kV, 10 kA/path
Weight	120 kg
Dimensions	19" rack (with wheels), 18 UH
Supply	standard mains 230 V / 16 A
Generators	MIG1260 or MIG12100
Optional	TC-ST + WARNING LAMP



NW40-350

Application	extension used to generate 40/350 μ s current
Current waveform SC	t_{rise} (10 – 90 % * 1.25): 40 μ s $t_{duration}$ (50 – 50 %): 350 μ s
Current amplitude SC	max. 10 kA +10 / - 0 %, with MIG1260 max. 20 kA +10 / - 0 %, with MIG12100
Weight	100 kg
Dimensions	19" rack (with wheels), 18 UH
Generators	MIG1260 or MIG12100
Optional	TC-ST + WARNING LAMP



CTS-10350

CTS-10350 circuit: current 10/350 μ s, 5 kA

Standards	IEC62305-4, IEC61643-11, IEC61643-21, Ericsson 1/1528-HRB 105 102/1
Impulse capacitance	2 x 596 μ F \pm 10 %
Energy at max. voltage	2 x 2000 joules
Adjustable current (<0.1 Ω)	(2 x) 0.1 kA – 2.7 kA \pm 10 %, max. 5.4 kA
Calibrated level	0.1 – 2.5 kA / circuit, 0.2 kA– 5 kA for 2 circuits
Current waveform	rise time: 8 μ s \pm 10 % (10 – 90 %)
Current waveform	half time: 350 μ s \pm 10 %
Output impedance	1 Ω / circuit, 0.5 Ω / 2 parallel circuits
Pulse repetition	1 pulse / 12 s @ 0.5 kA, 1 pulse / 60 s @ 2.7 kA
Polarity	positive, negative
Programmable ramp	current



CTS-10350 control features

Operating system	EPOS proprietary firmware
Languages	8 menu languages, selectable
User interface	7" capacitive touch display
Connectivity	gigabit ethernet, USB, RS485
Impulse polarity	positive, negative, electronic switching
Automatic ramp	test level
Trigger out	BNC, max. 6 V
Surge monitoring	peak voltage and current on screen, waveform available at BNC outputs
Surge voltage waveform	monitoring BNC output connector max. 15 V
Surge current waveform	monitoring BNC output connector max. 15 V
Programmable connectors	4 BNC connectors (inputs/outputs) as follows
Programmable input functions	Trigger input, Start Test, Stop Test, EUT Fail, EUT Mark, Emergency Stop
Programmable input max. voltage	low range: 0 – 1.5 V, high range: 2.3 – 24 V
Programmable output functions	Running State, Safety Circuit State
Programmable output max. U, I	max. 24 V, max. 300 mA
Safety features (standard)	Emergency stop button on front panel red/yellow as per IEC 60947-5-5, IEC 60204-1, ISO 13850 Safety circuit
Safety accessories (optional)	WARNING LAMP (24 V, max. 2.4 W), TC-ST test cabinet Remote EMERGENCY STOP button

[Capacitor](#) | [SPD](#) | [Circuit Breaker](#) | [Protection Relay](#)

CTS-10350 weight, dimensions, climatic conditions

Operating voltage	100 – 240 V (50/60 Hz) ± 10%
Power consumption	ON < 450 VA, standby < 15 VA
Weight	146 kg
W x d x h	60 x 650 x 124 cm
Version	19" rack on wheels, 18 UH
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

CTS-10350 optional accessories

Test cabinet	TC-ST, WARNING-LAMP
Software	TEMA3000: sequence, report, for Windows10

CTS-101000-500

CTS-101000-500 circuit: current 10/1000 µs, 500 A

Standards	IEC 61643-311, IEC 62475, ITU-T K.12, IEC 61051-1 ANSI C62.31 (only current waveform avail.)
Application	testing SPDs (2- or 3-terminals) with 10/1000 µs current impulse
Impulse capacitance	2 x 50 µF ± 10 %
Energy at max. voltage	2 x 1250 joules
Output impedance	2-terminals SPD >16 Ω, 3-terminals SPD >8 Ω
Adjustable current SC	8 A – 520 A, for 2-terminals SPD 2 x (8 A – 260 A), for 3-terminals SPD
Calibrated level SC	8 A – 520 A, for 2-terminals SPD 2 x (8 A – 260 A), for 3-terminals SPD
Current waveform	rise time 10 – 90 %: 8 µs + 20 % / -10% (0 – 100 %: 8 x 1.25 µs = 10 µs) Duration: 1000 µs ± 20%
Pulse repetition	1 / 60 s @ 260 / 520 A
Polarity	positive, negative, alternating
Programmable ramp	current
Sel. clamping voltage	0 – 4000 V
Level @clamping voltage	245A @250V, 172A @1500V (for 2-terminals SPD) 490A @250V, 344A @1500V (for 3-terminals SPD)



CTS-101000-500 control features

Operating System	EPOS proprietary firmware
Languages	8 menu languages, selectable
User interface	7" capacitive touch display
Connectivity	gigabit ethernet, USB, RS485
Impulse polarity	positive, negative, electronic switching
Automatic ramp	test level
Surge monitoring	peak voltage and current on screen, waveform available at BNC outputs
Surge voltage waveform	BNC output 1 V = 800 V in 1 MΩ
Surge current waveform	BNC output 1 V = 250 A in 1 MΩ
Trigger out	BNC, max. 6 V
Programmable connectors	4 BNC connectors (input/output) as follows
Programmable input functions	Trigger Input, Start Test, Stop Test, EUT Fail, EUT Mark, Emergency Stop
Programmable input max. voltage	low range: 0 – 1.5 V, high range: 2.3 – 24 V
Programmable output functions	Running State, Safety Circuit State
Programmable output max. U, I	max. 24 V, max. 300 mA
Safety features (standard)	emergency stop button on front panel, red/yellow as per IEC 60947-5-5, IEC 60204-1, ISO 13850 safety circuit
Safety accessories(optional)	WARNING LAMP red/green (24 V, max. 2.4 W) TC-ST test cabinet Remote EMERGENCY STOP button

CTS-101000-500 supply, weight, dimensions, climatic conditions

Operating voltage	100 – 240 (50/60 Hz) ± 10%
Power consumption	ON < 700 VA, standby < 15 VA
Weight	135 kg
W x d x h	60 x 65 x 123 cm
Version	19" rack, 18 UH with wheels, easy to move
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

CTS-101000-500 optional accessories

Test cabinet & lamp	TC-ST, WARNING LAMP
Software	TEMA3000: sequence, report, for Windows 10

CTS-101000-750

CTS-101000-750 circuit: current 10/1000 μ s, 750 A

Standards	IEC 61643-311, IEC 62475, ITU-T K.12, IEC 61051-1 ANSI C62.31 (only current waveform avail.)
Application	testing SPDs (2- or 3-terminals) with 10/1000 μ s current impulse
Impulse capacitance	2 x 75 μ F \pm 10 %
Energy at max. voltage	2 x 1838 joules
Output impedance	2-terminals SPD >12 Ω , 3-terminals SPD >6 Ω
Adjustable current SC	8 A – 760 A, for 2-terminals SPD 2 x (8 A – 385 A), for 3-terminals SPD
Calibrated level SC	8 A – 760 A, for 2-terminals SPD 2 x (8 A – 385 A), for 3-terminals SPD
Current waveform	rise time 10 – 90 %: 8 μ s + 20 % / -10% (0 – 100 %: 8 x 1.25 μ s = 10 μ s) Duration: 1000 μ s \pm 20%
Pulse repetition	1 / 60 s @ 385 / 760 A
Polarity	positive, negative, alternating
Programmable ramp	current
Sel. clamping voltage	0 – 4000 V
Level @clamping Voltage	363A @250V, 255A @1500V (for 2-terminals SPD) 726A @250V, 510A @1500V (for 3-terminals SPD)



CTS-101000-750 control features

Operating System	EPOS proprietary firmware
Languages	8 menu languages, selectable
User interface	7" capacitive touch display
Connectivity	gigabit ethernet, USB, RS485
Impulse polarity	positive, negative, electronic switching
Automatic ramp	test level
Surge monitoring	peak voltage and current on screen, waveform available at BNC outputs
Surge voltage waveform	BNC output 1 V = 800 V in 1 MΩ
Surge current waveform	BNC output 1 V = 500 A in 1 MΩ
Trigger out	BNC, max. 6 V
Programmable connectors	4 BNC connectors (input/output) as follows
Programmable input functions	Trigger Input, Start Test, Stop Test, EUT Fail, EUT Mark, Emergency Stop
Programmable input max. voltage	low range: 0 – 1.5 V, high range: 2.3 – 24 V
Programmable output functions	Running State, Safety Circuit State
Programmable output max. U, I	max. 24 V, max. 300 mA
Safety features (standard)	emergency stop button on front panel, red/yellow as per IEC 60947-5-5, IEC 60204-1, ISO 13850 safety circuit
Safety accessories (optional)	WARNING LAMP red/green (24 V, max. 2.4 W) TC-ST test cabinet Remote EMERGENCY STOP button

CTS-101000-750 supply, weight, dimensions, climatic conditions

Operating voltage	100 – 240 (50/60 Hz) ± 10%
Power consumption	ON < 700 VA, standby < 15 VA
Weight	165 kg
W x d x h	60 x 65 x 123 cm
Version	19" rack, 18 UH with wheels, easy to move
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

CTS-101000-750 optional accessories

Test cabinet & lamp	TC-ST , WARNING LAMP
Software	TEMA3000: sequence, report, for Windows 10

CTS-101000-1000

CTS-101000-1000 circuit: current 10/1000 μ s, 1000 A

Standards	IEC 61643-311, IEC 62475, ITU-T K.12, IEC 61051-1 ANSI C62.31 (only current waveform avail.)
Application	testing SPDs (2- or 3-terminals) with 10/1000 μ s current impulse
Impulse capacitance	2 x 100 μ F \pm 10 %
Energy at max. voltage	2 x 2450 joules
Output impedance	2-terminals SPD $>$ 8 Ω , 3-terminals SPD $>$ 4 Ω
Adjustable current SC	8 A – 1010 A, for 2-terminals SPD 2 x (8 A – 510 A), for 3-terminals SPD
Calibrated level SC	8 A – 1010 A, for 2-terminals SPD 2 x (8 A – 510 A), for 3-terminals SPD
Current waveform	rise time 10 – 90 %: 8 μ s + 20 % / -10% (0 – 100 %: 8 x 1.25 μ s = 10 μ s) Duration: 1000 μ s \pm 20%
Pulse repetition	1 / 60 s @ 385 / 760 A
Polarity	positive, negative, alternating
Programmable ramp	current
Sel. clamping voltage	0 – 4000 V
Level @clamping Voltage	481A @250V, 336A @1500V (for 2-terminals SPD) 962A @250V, 672A @1500V (for 3-terminals SPD)



CTS-101000-1000 control features

Operating System	EPOS proprietary firmware
Languages	8 menu languages, selectable
User interface	7" capacitive touch display
Connectivity	gigabit ethernet, USB, RS485
Impulse polarity	positive, negative, electronic switching
Automatic ramp	test level
Surge monitoring	peak voltage and current on screen, waveform available at BNC outputs
Surge voltage waveform	BNC output 1 V = 800 V in 1 MΩ
Surge current waveform	BNC output 1 V = 500 A in 1 MΩ
Trigger out	BNC, max. 6 V
Programmable connectors	4 BNC connectors (input/output) as follows
Programmable input functions	Trigger Input, Start Test, Stop Test, EUT Fail, EUT Mark, Emergency Stop
Programmable input max. voltage	low range: 0 – 1.5 V, high range: 2.3 – 24 V
Programmable output functions	Running State, Safety Circuit State
Programmable output max. U, I	max. 24 V, max. 300 mA
Safety features (standard)	emergency stop button on front panel, red/yellow as per IEC 60947-5-5, IEC 60204-1, ISO 13850 safety circuit
Safety accessories (optional)	WARNING LAMP red/green (24 V, max. 2.4 W)
	TC-ST test cabinet
	Remote EMERGENCY STOP button

CTS-101000-1000 supply, weight, dimensions, climatic conditions

Operating voltage	100 – 240 (50/60 Hz) ± 10%
Power consumption	ON < 700 VA, standby < 15 VA
Weight	170 kg
W x d x h	60 x 65 x 123 cm
Version	19" rack, 18 UH with wheels, easy to move
Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa
Included articles	
Power cord	with country plug
User manual	with conformity declaration
Calibration certificate	factory calibration

CTS-101000-1000 optional accessories

Test cabinet & lamp	TC-ST, WARNING LAMP
Software	TEMA3000: sequence, report, for Windows 10

CIRCUIT BREAKER TESTING

MIG0603CB

MIG0603CB: standard paragraphs covered (circuit breaker testing)

IEC60947-2:2003	B 8.6.1, B 8.6.2
IEC61008-1: 1996	9.19.1, 9.19.2, 9.20
IEC61009-1:1996	9.19.1, 9.19.2, 9.20



MIG0603CB circuit: voltage impulse 1.2/50 μ s, 50 and 500 Ω , 12 kV

Application	circuit breaker testing
Impulse capacitance	5 μ F \pm 10 %
Energy at max. voltage	420 joules
Output impedance	50 Ω and 500 Ω , selectable
Adjustable voltage OC	0.5 kV – 13 kV - 0 % / +10 %
Calibrated level	1 kV – 12 kV
Voltage waveform	1.2 μ s \pm 30 % / 50 μ s \pm 20 %
Undershoot	< 5 %
Waveform in tolerance	50 Ω : R > 1 k Ω or C < 5 nF or L > 100 mH 500 Ω : R > 10 k Ω or C < 0.5 nF or L > 200 mH
Current waveform	not defined
Pulse repetition	up to 1 / 5 s @ 1 kV, 1 / 15 s @ 12 kV
Polarity	positive, negative, alternating
Synchronization	0 – 360°, step 1°
Programmable ramps	voltage, synchronisation angle

MIG0603CB circuit: surge current impulse 8/20 μ s, 4 or 20 Ω , 3 kA

Application	circuit breaker testing
Impulse capacitance	10 μ F \pm 10 %
Energy at max. voltage	180 joules
Voltage waveform	not defined
Adjustable current range	10 A – 290 A -0 % / +10 %, Zout = 20 Ω 125 A – 3200 A -0 % / +10 %, Zout = 4 Ω
Calibrated level	50 A – 3000 A
Current waveform	8 μ s \pm 10 % / 20 μ s \pm 10 %
Undershoot	< 7 %
Pulse repetition	up to 1 / 5 s @ 0.25 kA, 1 / 14 s @ 3 kA
Polarity	positive, negative, alternating

MIG0603CB circuit: ring wave current impulse, 30 Ω, 250 A

Application	circuit breaker testing
Impulse capacitance	0.5 μF ± 10 %
Energy at max. voltage	10 joules
Output impedance	30 Ω, according to circuit in the standard
Voltage waveform	not defined
Adjustable current range	10 A – 290 A -0 % / +10 %
Calibrated current level	10 A – 250 A
Current waveform	ring wave 0.5 μs (± 30 %) / 100 kHz (± 20 %)
Current waveform decay	second to first amplitude 60 % (-0 % / +50 %)
Pulse repetition	up to 1 / 10 s @ 10 A, 1 / 14 s @ 250 A
Polarity	positive, negative, alternating

MIG0603CB built-in single-phase CDN

Test level 8/20 μs surge	max. 3.2 kA
Test level 0.5/100 ring wa.	max. 290 A
EUT power input	L1, L2 (or N), PE max. AC 440 V, 16 A
EUT overcurrent protection	2 x 16 A, L1 and L2 (or N)
Internal CDN freq. range	50 Hz, 60 Hz
Coupling surge and ring	only L1 – L2 (or N), no PE coupling possible
Decoupling	1.8 mH

MIG0603CB control features

User interface	LCD and keypad, efficient menu structure
Communication interface	RS232 with (optional) adapter to USB
Surge voltage monitor BNC	10 V = 12 kV, accuracy ± 3%, for 1.2/50 μs
Surge current monitor BNC	10 V = 30 or 300 A, acc. ± 3%, for 1.2/50 μs 10 V = 0.3 or 3 kA, acc. ± 3%, for 8/20 μs 10 V = 300 A, acc. ± 3%, for 0.5/100 ring
Surge voltage on display	0.1 – 13 kV, accuracy ± 3%, for 1.2/50 μs
Surge current on display	10 A – 330 A, accuracy ± 3%, for 1.2/50 μs 10 A – 3.3 kA, accuracy ± 3%, for 8/20 μs 10 A – 330 A, accuracy ± 3%, for 0.5/100 ring
Trigger out	BNC, max. 12 V
Trigger in	auto, manual, external (BNC input)
Synchro. source	EUT power, direct out
Power synchro. on/off	0 – 360°, 1° step
Impulse counter	programmable up to 29'999
Emergency stop	Emergency Stop button, BNC input (EUT Fail)
Internal memory	up to 15 tests can be saved and recalled

MIG0603CB supply, weight, dimensions, climatic conditions

Operating voltage	115 / 230 V (50/60 Hz) ± 10%
Power consumption	ON < 400 VA, standby < 10 VA

Weight	61 kg
W x D x H	45 x 57 x 61 cm
Version	19" unit, 12 UH

Temperature range	10 – 35 °C
Humidity	< 80 % non-condensing
Air pressure	86 – 106 kPa

Included articles

Power cord	with country plug
Supply connection	5 cables x 2 m, banana plugs
User manual	with conformity declaration
Calibration certificate	factory calibration

MIG0603CB optional accessories

Test cabinet	TC-ST + WARNING LAMP
MIG1206 generator	surge coupling paths 2, 12 Ω up to 12 kV
Software	TEMA: sequence, report, for latest Windows

GENERAL ACCESSORIES

TC-ST

Standard	multiple
Application	test cabinet with safety circuit
Mounting	on top of generator
EUT volume	20 x 20 x 30 cm
Test cabinet material	acrylic glass
Insulation withstand	pulse 1.2/50 µs up to 30 kV
Weight	8 kg
Dimensions	43.5 x 47 x 25.4 cm
Included	control cable to generator
For generators	For all EMC PARTNER AG generators
Accessories	WARNING LAMP , EMERGENCY-STOP



WARNING-LAMP

Application	red/green signalization lamp
Protection class	IP65, IEC 61140, VDE 0140-1
Mounting support	magnetic support, crewable bracket included
Lamp type	red and green (2 lamps), LED technology
Weight	0.3 kg
Dimensions	30x25x6cm
Included	control cable to TC-ST/generator
For generators	All EMC PARTNER AG generators



EMERGENCY-STOP

Application	remote emergency stop button
Colours	standard red/yellow as in IEC 60947-5-5
Mounting	on table, magnetic support als included
Weight	0.5 kg
Dimensions	78 x 72 x 64 mm
Included	5m cable
For generators	All EMC PARTNER AG generators



Tradition meets Technology

Over 25 years devoted to combining
latest technologies into the best products.

 **100% Swiss made products**



EMC PARTNER

PRODUCT APPLICATION RANGE

CONSUMER & INDUSTRIAL ELECTRONICS

Transient Test Systems for conducted EMC tests on electronic equipment. ESD, EFT, surge, ring wave, DOW, dips, magnetic field, common and differential mode. Compliant to IEC, EN and ANSI standards.



AEROSPACE ELECTRONICS

Impulse generators and couplers for avionic applications. Single stroke, multiple stroke and multiple burst according to RTCA / DO-160, EUROCAE / ED-14 and aircraft manufacturer standards.



COMPONENT TESTING

Voltage and current Impulse generators for design and production testing of varistors, gas discharge tubes, surge protective devices, X / Y capacitors and specialist impulse generators for semiconductor tests.



DEFENCE ELECTRONICS

Complete test solutions for MIL-STD-461 requirements CS06, CS106, CS115, CS116, CS117 and CS118.



TELECOM & DATA LINE TESTING

Voltage and current impulse generators, CDNs, power contact, power induction equipment for exchange and customer equipment according to ITU, IEC, EN and ETSI requirements.



ENERGY & UTILITY EQUIPMENT

High current CDNs combined with transient test equipment fulfil requirements to test renewable and classical energy distribution network and monitoring equipment.



CUSTOMER SERVICES

Customer support throughout an equipment's lifetime is central to the EMC PARTNER AG philosophy. Directly from our ISO accredited facility in Switzerland or through our network of services centres, we provide support wherever you are.



For further information please do not hesitate to contact your local EMC PARTNER AG representative.
Visit our website for more information and contact details.

www.emc-partner.com



Swiss Headquarters

EMC PARTNER AG
Baselstrasse 160
CH - 4242 Laufen

Phone +41 61 775 20 30
Fax +41 61 775 20 59
Email service@emc-partner.ch
Web www.emc-partner.com

Your local representative

Information and specifications in this document are an indication of capability only. Version 6.4 Subject to change without notice. EMC PARTNER AG publishes only the english version of this document. Translation into other languages is not guaranteed to be a true representation of content or specification.

© by EMC PARTNER AG. No changes or reproduction without permission of EMC PARTNER AG allowed.