





SVV 016 PA, HV gate valve, electro-pneumatic, with PI, with PV, 230 V, 50 Hz






## **SVV 016 PA**



SVV 016 PA, HV gate valve, electro-pneumatic, with PI, with PV, 230 V, 50 Hz

- High conductance due to free clearance
- Vulcanized valve disk seal
- With visual indication of open and closed positions
- Service life: 50000 operating cycles

## **Dimensions**

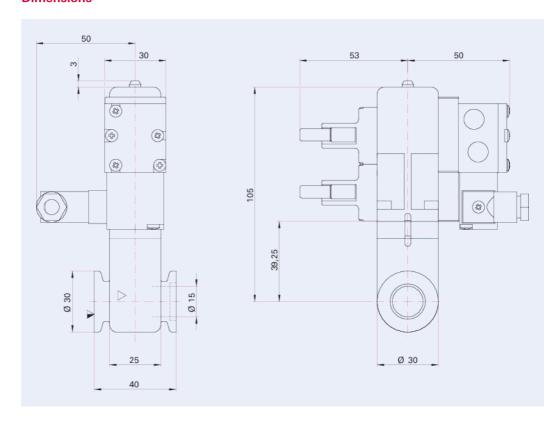

## **SVV 016 PA**

Technical Data	SVV 016 PA, HV gate valve, electro-pneumatic, with PI, with PV, 230 V, 50 Hz
Seal: Housing	FKM
Seal: Valve seat	FKM
Feedthrough	Slideway
Opens against differential pressure of	30 hPa
Туре	HV gate valve
Valve plate	Stainless steel
Housing	Aluminum
Actuator	Electro-pneumatic
Position feedback: Load capacity at 50 V DC	0.5 A
Input voltage(s)	230 V AC, 50 Hz
Tightness	1 · 10 <sup>-10</sup> Pa m <sup>3</sup> 1.33 · 10 <sup>-8</sup> 1 · 10 <sup>-8</sup> /s   Torr l/s   mbar l/s
Bakeout temperature: actuator	50 °C   122 K   -223.15 °F
Conductance value with molecular flow	10 l/s
Pressure max. (absolute)	1,000 hPa   750 Torr   1,000 mbar
Bakeout temperature: housing	100 °C   212 K   -173.2 °F
Pressure min.	1 · 10 <sup>-7</sup> hPa   7.5 · 10 <sup>-8</sup> Torr   1 · 10 <sup>-7</sup> mbar
Differential pressure in closing direction	1,000 hPa   750 Torr   1,000 mbar
Differential pressure in opening direction	1,000 hPa   750 Torr   1,000 mbar
Weight	0.8 kg   1.76 lb
Compressed air volume	10 cm <sup>3</sup>
Pressure max. (absolute)	1,000 hPa
Power consumption	24 V DC / 5.4 W
Connection flange	DN 16 ISO-KF
Closing/opening time	0.8 s/0.8 s
Compressed air (overpressure)	4 500 – 7 000 hPa
Differential pressure in closing direction	1,000 hPa
Differential pressure in opening direction	1,000 hPa
Weight	0.8 kg

Order number	SVV 016 PA, HV gate valve, electro-pneumatic, with PI, with PV, 230 V, 50 Hz
SVV 016 PA, HV gate valve, electro- pneumatic, with PI, with PV, 230 V, 50 Hz	PF D38 500



## Your Success. Our Passion.

We give our best for you every day worldwide!



Are you looking for an optimum vacuum solution? Talk to us: Pfeiffer Vacuum Components & Solutions GmbH Germany T+49 551 99963-0 info-cs@pfeiffer-vacuum.com Or scan the barcode, to visit our web page:



https://webportal.pfeiffer-vacuum.com/global/en/contact



Follow Us On Social Media #pfeiffervacuum













