

PINTEK

AC/DC Current Probe

★ DC~1.5MHz
1mA~40ADC / 80Ap-p

High
Sensitivity!




PA-699


- Max. $\pm 40\text{ADC}/80\text{Ap-p}$
- Sensitivity: $\geq 1\text{mA}$
- Bandwidth: DC~1.5MHz
- Rise Time: $0.23\mu\text{S}$
- Over Range Function
- 1V/A, 0.1V/A Range
- Adaptor/Battery Input
- Separating Design,
Convenient Durable



Pintek Electronics Co., Ltd
www.pintek.com.tw

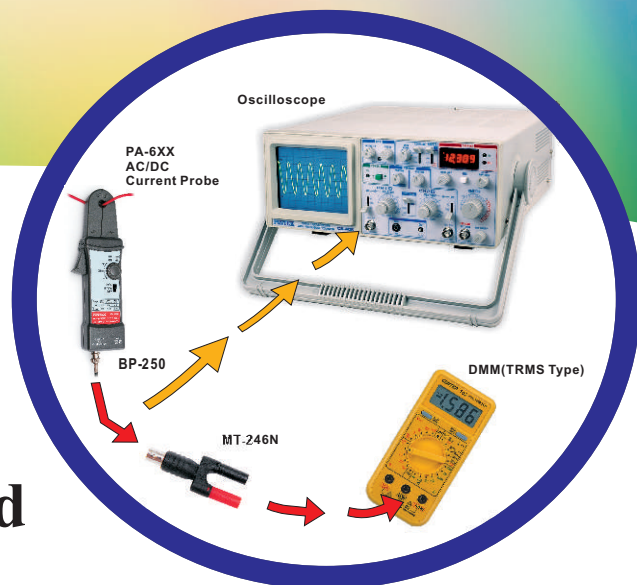



PA-699 AC/DC Current Probe

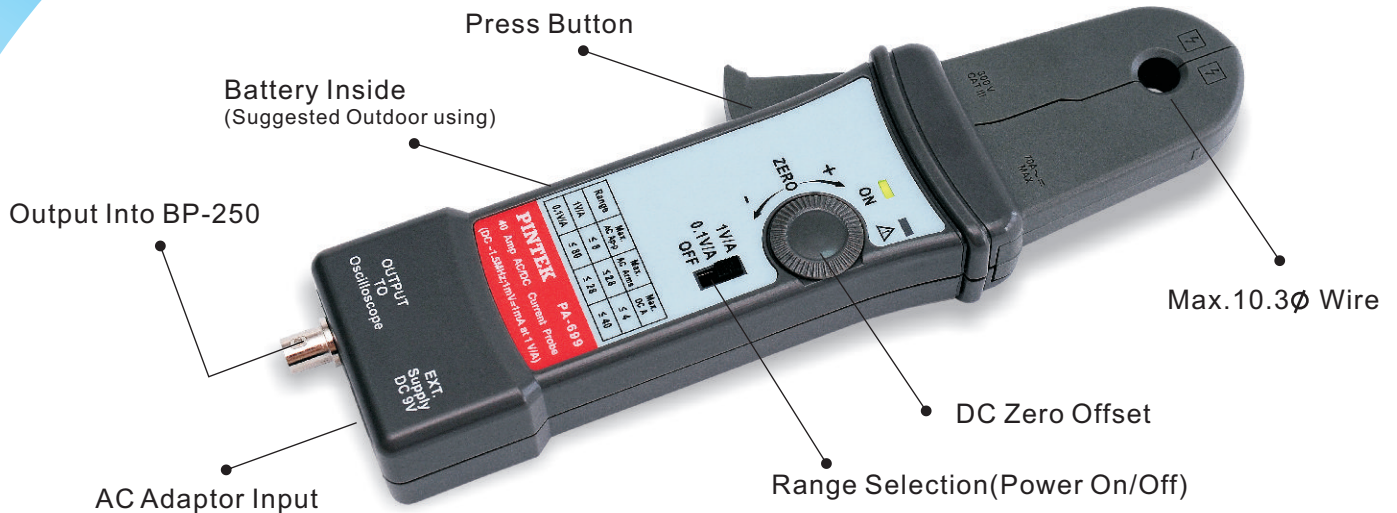

SPECIFICATIONS:

FUNCTION/MODEL	PA-699
Accuracy Typical	±3%: 10mA~8A peak at 1V/A ±4%: 100mA~80A peak at 0.1V/A
Max. Working Voltage	300V CAT III
Max. Sensitivity	≥ 1 mA
Frequency Range	DC-1.5MHz(-3dB)
Rise Time	0.23 μS
Battery or Adaptor	9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor
Accessories	BP-250, MT-246N, Adaptor, Instruction Manual.

Waveform Comparison Between PA-699 And Other Brand In Market:

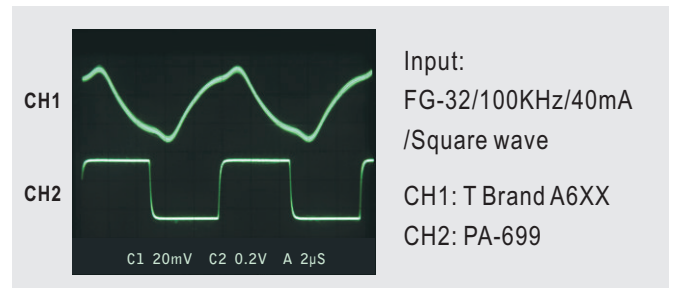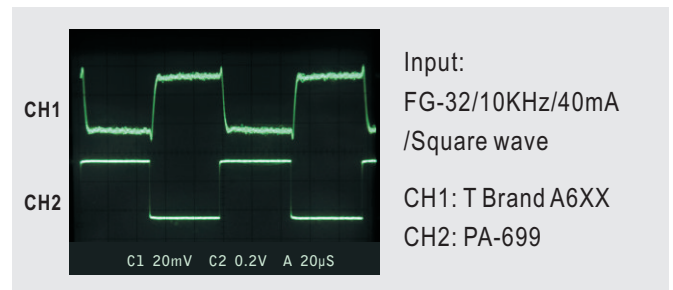

ACCESSORIES:



PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan
Tel: 886-2-86859562~3 ; 886-2-86861898
Fax: 886-2-86852081 ; 886-2-86861114
http://www.pintek.com.tw
E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net



SALES AGENT